



- **Identifying Common Causes of Garage Door Malfunctions**
Identifying Common Causes of Garage Door Malfunctions Step by Step
Methods for Replacing Broken Springs **Techniques for Realigning Garage Door**
Tracks **Recognizing Signs of Worn Cables** **Addressing Sudden Door**
Stoppages During Operation **Evaluating Garage Door Noise Issues** **Diagnosing**
Problems with Door Opener Sensors **Quick Fixes for Sluggish Door Response**
Understanding Proper Balance in Garage Door Systems **Inspecting Rollers for**
Smooth Movement **Strategies for Resolving Intermittent Door Jams** **Confirming**
Adequate Tension in Garage Door Springs
- **Comparing Steel Wood and Aluminum Garage Doors**
Comparing Steel Wood and Aluminum Garage Doors **Considering Natural**
Wood Finishes for Classic Appeal **Evaluating Benefits of Powder Coated**
Surfaces **Selecting Weather Resistant Materials for Exterior Conditions**
Understanding Differences in Garage Door Finishes **Assessing Durability of**
Various Door Materials **Approaches for Maintaining Painted Garage Door**
Surfaces **Considering Environmental Impact of Material Choices** **Identifying**
Suitable Finish Options for Climate Conditions **Techniques for Preserving**
Color in Garage Door Panels **Practical Methods for Removing Surface Stains**
Balancing Aesthetics and Function in Material Selections
- **About Us**



Garage doors are an essential part of our daily lives, providing both security and convenience. While they may seem simple in operation, garage doors rely on a complex system of components working together seamlessly. Aluminum garage doors are lightweight and resistant to rust **garage door repair cost** company. Among these components, cables play a crucial role in ensuring the smooth and safe operation of the door. Understanding the common types of cables used in garage door installations and recognizing signs of wear can help prevent potential issues and ensure the longevity of your garage door.

Typically, there are two main types of cables used in garage door systems: torsion spring cables and extension spring cables. Torsion spring cables are commonly found in newer garage doors and work with torsion springs located above the door. These cables wind around drums as the door opens and unwind as it closes, supporting the weight of the door throughout its movement. On the other hand, extension spring cables are more prevalent in older systems. They work alongside extension springs positioned parallel to the horizontal tracks, extending and contracting as the door operates.

Recognizing signs of worn or damaged cables is critical for maintaining a functional garage door system. One clear indicator is visible fraying or corrosion on the cable itself. Over time, exposure to moisture and temperature fluctuations can lead to rust formation, weakening the metal strands that make up the cable. Frayed ends or broken strands not only compromise safety but also indicate that replacement is necessary.

Another sign to watch for is increased noise during operation. A garage door that suddenly begins making grinding or squealing noises could have worn-out cables struggling to support its weight properly. In such cases, immediate inspection by a professional is advisable to prevent further damage or accidents.

Additionally, if you notice your garage door moving unevenly or appearing off-balance, this might suggest that one or both cables have lost tension or snapped entirely. A misaligned door not only affects functionality but also poses significant safety risks.

Regular maintenance can go a long way in preventing cable wear and prolonging their lifespan. Homeowners should periodically inspect their garage doors for any signs of damage or unusual performance issues. Lubricating moving parts like pulleys and hinges reduces friction and helps maintain smooth operation.

In conclusion, understanding the types of cables used in garage door installations-torsion spring cables for newer doors and extension spring cables for older models-is essential for proper maintenance and safety awareness. By recognizing early warning signs such as fraying, corrosion, unusual noises, and imbalance, homeowners can address potential problems before they escalate into costly repairs or hazards. Proactive care ensures that your garage door remains reliable for years to come while safeguarding your home's entry point efficiently.

Role of Quality Materials in Preventing Malfunctions —

- Importance of Proper Alignment During Installation
- Role of Quality Materials in Preventing Malfunctions
- Impact of Incorrect Tension Settings on Garage Door Performance
- Common Electrical Issues Arising from Faulty Installations
- Influence of Environmental Factors on Installed Garage Doors
- Routine Maintenance Tips for Newly Installed Garage Doors

Visual Inspection Techniques for Identifying Worn or Damaged Cables: Recognizing Signs of Worn Cables

In the realm of electrical systems and cable management, ensuring the integrity and safety of cables is paramount. The efficiency and safety of any system heavily depend on the condition of its cables, which serve as the lifeline for power distribution and communication. Over time, however, these cables are subjected to various stresses that can lead to wear and damage. Hence, regular inspection becomes crucial in preventing potential hazards such as fires, electrical failures, or costly downtime. Visual inspection techniques play a vital role in identifying worn or damaged cables before they escalate into more severe problems.

One of the primary indicators of cable wear is physical damage to the outer insulation. During visual inspections, technicians should look for cracks, cuts, or abrasions on the cable's surface. Such damage can expose the conductive elements within the cable to external environments, increasing the risk of short circuits or electric shocks. Furthermore, discoloration or melting marks on insulation could signify overheating issues due to excessive current flow or environmental factors like proximity to heat sources.

Another sign that warrants attention is deformation in cable shape. Kinks, bends, or twists can compromise a cable's structural integrity over time. These deformations often result from improper installation practices or mechanical stress during operation. Regular inspection helps detect these anomalies early, allowing for corrective measures before they cause significant disruptions.

Corrosion is also a common issue associated with worn cables, especially those exposed to moisture-laden environments. Inspectors should be vigilant about spotting greenish deposits (indicative of copper corrosion) or white powdery residue (often seen with aluminum). Corroded connectors can lead to increased resistance in electrical circuits and eventually cause overheating.

Additionally, inspecting termination points where cables connect to devices or panels is essential. Loose connections not only pose safety risks but also degrade performance by causing intermittent faults and voltage drops. Visual cues like frayed wires at termination points can indicate inadequate strain relief provisions during installation.

The presence of unusual odors around cabling setups may also hint at underlying issues such as insulation breakdown due to chemical reactions over time under exposure conditions beyond design limits-factors leading potentially hazardous situations needing immediate intervention upon detection via routine visual checks across installations periodically undertaken proactively rather than reactively responding post-failure occurrences typically resulting otherwise avoidable consequential damages effectively managed instead through timely preventive maintenance actions informed via diligent monitoring efforts consistently applied throughout service life cycles managed responsibly overall achieving optimal outcomes sustainably maintained long-term reliability expectations met satisfactorily indeed!

In conclusion then therefore ultimately thus accordingly henceforth hereto forthwith conclusively summarizing herewith now finally therein encapsulating hereinabove aforesaid aforementioned insights discussed hitherto thereby emphasizing importance thereof ongoing vigilance exercised continually assiduously diligently attentively conscientiously scrupulously meticulously rigorously thoroughly exhaustively comprehensively extensively intensively methodically systematically strategically tactically operationally functionally practically feasibly economically efficiently cost-effectively resourcefully responsibly sustainably securely safely reliably dependably enduringly durably robustly resiliently flexibly adaptively innovatively creatively ingeniously intelligently wisely prudently judiciously rationally sensibly logically perceptually insightfully sagaciously thoughtfully reflectively mindfully attentively observantly alertly keen-eyed sharp-eyed eagle-eyed hawk-eyed far-sighted clear-sighted visionary perceptive discerning shrewd astute sharp insightful piercing penetrating incisive acute attentive aware heedful watchful vigilant cautious guardful wary chary circumspect careful

Posted by on

Posted by on

Impact of Incorrect Tension Settings on Garage Door Performance

In the modern world, where technology is an integral part of our daily lives, cables serve as the unsung heroes behind seamless connectivity and power supply. From charging devices to connecting complex networks, these essential components often operate in the background, quietly ensuring that everything runs smoothly. However, like all physical objects, cables are not immune to wear and tear. Recognizing the signs and symptoms of potential cable degradation is crucial for maintaining functionality and preventing more significant issues down the line.

One of the most apparent indicators of cable wear is visible physical damage. This can include frayed or exposed wires, which are often caused by bending or twisting the cable beyond its capacity. Such damage not only impairs performance but also poses a safety hazard due to

exposed electrical currents. Additionally, discolored or burnt sections on a cable may suggest overheating or short-circuiting incidents, necessitating immediate attention.

Another subtle yet telling sign of cable wear is intermittent connectivity problems. If a previously reliable connection starts to falter-where devices frequently disconnect or fail to establish a connection-the culprit might be a compromised cable. These issues often arise from internal wire breakage or loose connections that disrupt signal transmission.

A decrease in charging efficiency can also indicate deteriorating cables, particularly with charging cords for electronic devices. If a device takes significantly longer to charge than usual or does not charge at all when connected with a particular cable, it could be time for an inspection. Over time, repeated coiling and uncoiling can lead to internal fatigue within the wire structure.

Additionally, unusual heat generation from cables during use can be symptomatic of underlying problems. While some warmth is normal under operation due to electrical resistance, excessive heat signifies that the cable might be handling more current than it's designed for-or worse-there's an ongoing short circuit within its structure.

Lastly, paying attention to any strange odors emanating from cables can serve as a critical warning sign. A burning smell often indicates serious issues such as melting insulation due to heat buildup or electrical faults that could lead to fires if left unchecked.

Recognizing these signs early allows users to take preventive measures before minor inconveniences develop into major malfunctions or hazards. Regular inspections and routine testing should become part of maintenance practices wherever cables are employed extensively-be it in households or industrial settings.

In conclusion, while they may seem mundane compared to their high-tech counterparts like smartphones and computers, cables play an indispensable role in our technological ecosystem-and their maintenance is equally important. By staying vigilant about potential signs of wear and tear such as physical damage, connectivity inconsistencies, decreased efficiency in functionally related tasks like charging speed reductions-even subtle cues like temperature fluctuations-a proactive approach helps ensure safety while prolonging the life span and effectiveness of these vital components in our everyday lives.





Common Electrical Issues Arising from Faulty Installations

In the modern world, cables are the lifelines of our technological ecosystem, connecting devices and facilitating seamless communication. From powering household appliances to ensuring robust data transmission in large corporations, cables play an indispensable role. However, like all physical components, cables are susceptible to wear and tear over time. Recognizing signs of worn cables early and implementing preventive measures can significantly extend their lifespan, ensuring both safety and efficiency.

One of the most telling signs of a worn cable is visible damage to the outer insulation. This damage can manifest as fraying, cracking, or discoloration. When the protective layer is compromised, it exposes the inner wires to environmental factors such as moisture and dust, which can lead to short circuits or even fires. Additionally, damaged insulation may result in electric shocks if touched inadvertently. Therefore, regular visual inspections are crucial in identifying these issues before they escalate into hazardous situations.

Another indication of cable wear is intermittent connectivity or performance issues. For instance, if a power cable frequently loses connection or a network cable results in dropped signals or fluctuating internet speeds, it may be due for replacement. These symptoms suggest that internal wires could be damaged or that connectors are loose or corroded. Ensuring secure connections and addressing any loose attachments promptly can prevent further degradation.

To extend the lifespan of cables proactively, adopting several preventive measures is essential. First and foremost is proper installation; avoid excessive bending or twisting during setup as such stress can weaken cable integrity over time. Additionally, using appropriate clips or ties prevents unnecessary strain on connectors and keeps cables organized-this not only enhances functionality but also aids in quick identification during maintenance checks.

Environmental considerations are equally important in preserving cable longevity. Keep cables away from areas prone to moisture exposure or extreme temperatures as these conditions accelerate deterioration. In industrial settings where cables might be exposed to chemicals or heavy machinery movement, opting for ruggedized versions designed for harsh environments provides added protection.

Regular maintenance tips include cleaning connectors with compressed air to remove dust accumulation that could hinder performance over time and applying contact cleaner solutions specifically formulated for electronic components when corrosion is detected at connection points.

In conclusion, recognizing signs of worn cables is imperative for maintaining safe operations across various applications while avoiding costly downtimes associated with unexpected failures caused by neglected upkeep practices. By adhering diligently not only towards identifying telltale indicators but also implementing preventive steps coupled alongside routine care activities geared towards extending life expectancy-the reliability quotient inherent within this invisible yet critical infrastructure remains firmly intact throughout its operational tenure effectively serving intended purposes without compromise thereby fostering an environment conducive toward progress sustainability alike moving forward collectively together harmoniously advancing shared goals aspirations globally interconnected society we inhabit today tomorrow beyond!

Influence of Environmental Factors on Installed Garage Doors

Recognizing the signs of worn cables is a critical skill for anyone involved in handling or replacing these essential components. Cables, often taken for granted in their silent service, are vital conduits of power and communication. Over time, however, they can deteriorate due to various factors such as environmental conditions, mechanical stress, and age. Understanding the indicators of wear not only ensures operational efficiency but also safeguards against potential hazards.

One of the most apparent signs of cable wear is visible damage to the outer insulation. This may manifest as fraying, cracking, or discoloration. Such deterioration compromises the cable's integrity and can lead to dangerous situations like electrical shorts or fires. Regular visual inspections are crucial in identifying these issues early on. In environments exposed to harsh weather or chemicals, cables are particularly susceptible to rapid degradation; thus, extra vigilance is necessary.

Another indicator that a cable may need replacement is unusual stiffness or brittleness. Flexibility is an inherent property of many cable types designed to withstand movement and

bending during use. When a cable loses its suppleness, it often signals internal corrosion or material fatigue. This can result from prolonged exposure to extreme temperatures or constant mechanical manipulation beyond its design capacity.

Additionally, any noticeable performance issues such as intermittent connectivity problems or unexpected power losses should prompt an immediate inspection of associated cables. These problems could stem from internal damage not visible externally but equally compromising in terms of functionality and safety.

Furthermore, look out for any peculiar odors emanating from cables during operation—a burnt smell could indicate overheating due to internal short circuits caused by worn-out conductors.

When recognizing signs of worn cables, it's also important to consider the age and usage history of each component within your system. Even without obvious physical wear marks, older cables might have reached their lifespan limits based on manufacturer specifications.

In summary, recognizing the signs of worn cables involves a combination of vigilant observation for physical damage such as fraying or discoloration; monitoring flexibility changes; being alert to performance inconsistencies; detecting unusual smells; and considering the age and usage history. By maintaining awareness and conducting regular checks with these factors in mind, one can ensure timely intervention before minor issues escalate into major safety hazards—thereby protecting both equipment functionality and personal safety.





Routine Maintenance Tips for Newly Installed Garage Doors

In the ever-evolving landscape of technology and connectivity, cables remain the unsung heroes that bridge the gap between our devices and the broader networked world. From powering our homes to enabling high-speed internet connections, cables are integral to daily life. However, like all physical components, they are subject to wear and tear over time. Recognizing signs of worn cables is essential for maintaining safety, reliability, and performance in both residential and professional environments.

Cables can exhibit various symptoms when they start to wear out, each serving as a crucial indicator that intervention might be necessary. One of the most apparent signs is visible damage. This includes frayed or exposed wires where the protective outer coating has been compromised. Such exposure not only poses a risk of electrical shock but also increases the likelihood of short circuits that could damage connected devices or cause fires.

Another sign of cable wear is intermittent connectivity issues. Devices may lose their connection or power sporadically if a cable has internal breaks or weakened connectors. These interruptions can be frustrating in a home setting but catastrophic in professional environments where continuous operation is critical.

Moreover, overheating can be a subtle yet dangerous symptom of worn cables. When insulation breaks down or conductors become damaged, it can lead to increased resistance within the cable, causing it to heat up excessively during use. Overheating not only shortens the lifespan of the cable itself but also poses significant fire hazards.

If any such signs are observed, it may be time to seek expert help for professional assessment. While some individuals might feel confident attempting DIY repairs or replacements, it's important to acknowledge that handling electrical components without proper knowledge can lead to further damage or safety risks.

Professional technicians have the expertise and tools necessary to accurately diagnose cable issues. They can assess whether simple repairs will suffice or if complete replacement is warranted based on current standards and regulations. Moreover, experts stay informed about advances in cabling technology and materials that might offer better durability or performance than older installations.

Seeking expert help early not only ensures safety but also minimizes downtime by addressing potential problems before they escalate into more severe failures. Professional assessments

often include recommendations for upgrades that could enhance overall system efficiency and capacity—a valuable consideration as technology continues to advance rapidly.

In conclusion, recognizing signs of worn cables is an essential skill for anyone who relies on electronic systems regularly—essentially everyone today! Visible damage, connectivity issues, and overheating are key indicators that should prompt action rather than delay. By seeking expert help promptly when these signs are noticed, individuals can ensure their systems remain safe, reliable, and ready for whatever demands modern life presents next.

About Energy efficiency

Energy efficiency may refer to:

- Energy efficiency (physics), the ratio between the useful output and input of an energy conversion process
 - Electrical efficiency, useful power output per electrical power consumed
 - Mechanical efficiency, a ratio of the measured performance to the performance of an ideal machine
 - Thermal efficiency, the extent to which the energy added by heat is converted to net work output or vice versa
 - Luminous efficiency, a measure of how well a light source produces visible light
 - Fuel efficiency, the efficiency of converting potential energy in a fuel into kinetic energy
 - Energy efficiency in transportation, the fuel economy of various modes of transportation
 - Energy-efficient landscaping, a type of landscaping designed for the purpose of conserving energy
- Efficient energy use, minimizing the amount of energy used for a given, constant energy service
- Energy conservation, reducing energy consumption by using less of an energy service

See also

[edit]

- Energy (disambiguation)
- Efficiency (disambiguation)
- Energy rating (disambiguation)
- All pages with titles containing *Energy efficiency*
- All pages with titles containing *Energy efficient*

Disambiguation icon


image not found or type unknown

This disambiguation page lists articles associated with the title **Energy efficiency**. If an internal link led you here, you may wish to change the link to point directly to the intended article.

About light-emitting diode

This article is about the electronic device. For specific use in lighting, see LED lamp. "LED" and "Led" redirect here. For other uses, see LED (disambiguation).

Light-emitting diode

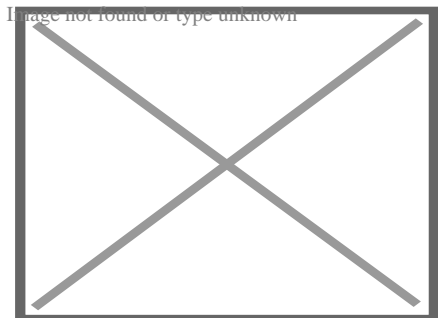

Blue, green, and red LEDs in 5 mm diffused cases. There are many different variants of LEDs.

Working principle

Electroluminescence

Inventor

- H. J. Round (1907)^[1]
- Oleg Losev (1927)^[2]
- James R. Biard (1961)^[3]
- Nick Holonyak (1962)^[4]


First production


October 1962; 62 years ago

Pin names


Anode and cathode

Electronic symbol



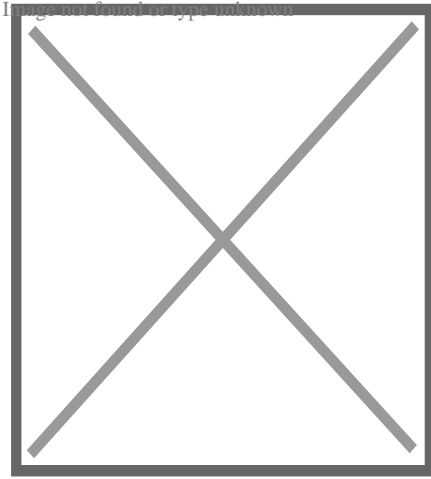

Parts of a conventional LED. The flat bottom surfaces of the anvil and post embedded inside the epoxy act as anchors, to prevent the conductors from being forcefully pulled out via mechanical strain or vibration.

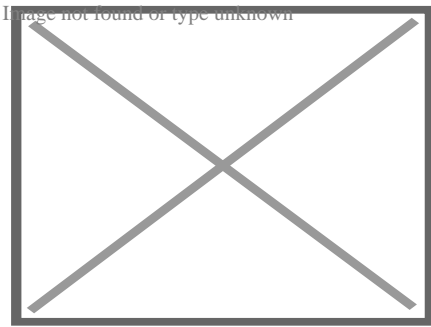

Close-up image of a surface-mount LED

Close-up of an LED with the voltage being increased and decreased to show a detailed view of its operation

Modern LED retrofit with E27 screw in base

Image not found or type unknown

A bulb-shaped modern retrofit LED lamp with aluminum heat sink, a light diffusing dome and E27 screw base, using a built-in power supply working on mains voltage

A **light-emitting diode (LED)** is a semiconductor device that emits light when current flows through it. Electrons in the semiconductor recombine with electron holes, releasing energy in the form of photons. The color of the light (corresponding to the energy of the photons) is determined by the energy required for electrons to cross the band gap of the

semiconductor.^[5] White light is obtained by using multiple semiconductors or a layer of light-emitting phosphor on the semiconductor device.^[6]

Appearing as practical electronic components in 1962, the earliest LEDs emitted low-intensity infrared (IR) light.^[7] Infrared LEDs are used in remote-control circuits, such as those used with a wide variety of consumer electronics. The first visible-light LEDs were of low intensity and limited to red.

Early LEDs were often used as indicator lamps, replacing small incandescent bulbs, and in seven-segment displays. Later developments produced LEDs available in visible, ultraviolet (UV), and infrared wavelengths with high, low, or intermediate light output, for instance, white LEDs suitable for room and outdoor lighting. LEDs have also given rise to new types of displays and sensors, while their high switching rates are useful in advanced communications technology with applications as diverse as aviation lighting, fairy lights, strip lights, automotive headlamps, advertising, general lighting, traffic signals, camera flashes, lighted wallpaper, horticultural grow lights, and medical devices.^[8]

LEDs have many advantages over incandescent light sources, including lower power consumption, a longer lifetime, improved physical robustness, smaller sizes, and faster switching. In exchange for these generally favorable attributes, disadvantages of LEDs include electrical limitations to low voltage and generally to DC (not AC) power, the inability to provide steady illumination from a pulsing DC or an AC electrical supply source, and a lesser maximum operating temperature and storage temperature.

LEDs are transducers of electricity into light. They operate in reverse of photodiodes, which convert light into electricity.

History

[edit]

Main article: History of LEDs

The first LED was created by Soviet inventor Oleg Losev^[9] in 1927, but electroluminescence was already known for 20 years, and relied on a diode made of silicon carbide.

Commercially viable LEDs only became available after Texas Instruments engineers patented efficient near-infrared emission from a diode based on GaAs in 1962.

From 1968, commercial LEDs were extremely costly and saw no practical use. Monsanto and Hewlett-Packard led the development of LEDs to the point where, in the 1970s, a unit cost less than five cents.^[10]

Physics of light production and emission

[edit]


Main article: Light-emitting diode physics

In a light-emitting diode, the recombination of electrons and electron holes in a semiconductor produces light (be it infrared, visible or UV), a process called "electroluminescence". The wavelength of the light depends on the energy band gap of the semiconductors used. Since these materials have a high index of refraction, design features of the devices such as special optical coatings and die shape are required to efficiently emit light.^{[1][1]}

Unlike a laser, the light emitted from an LED is neither spectrally coherent nor even highly monochromatic. Its spectrum is sufficiently narrow that it appears to the human eye as a pure (saturated) color.^{[12][13]} Also unlike most lasers, its radiation is not spatially coherent, so it cannot approach the very high intensity characteristic of lasers.


Single-color LEDs

[edit]

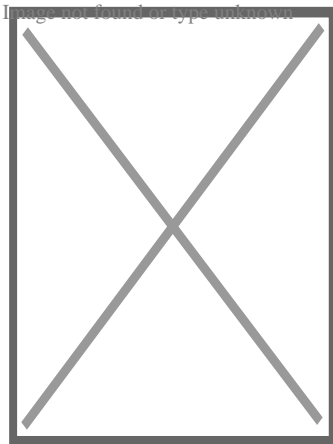

Blue LEDs

External videos

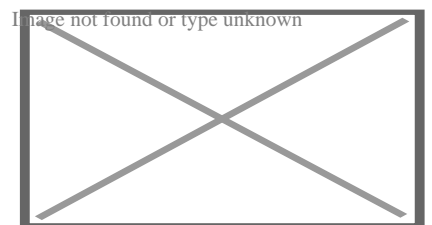

By selection of different semiconductor materials, single-color LEDs can be made that emit light in a narrow band of wavelengths from near-infrared through the visible spectrum and into the ultraviolet range. The required operating voltages of LEDs increase as the emitted wavelengths become shorter (higher energy, red to blue), because of their increasing semiconductor band gap.

Blue LEDs have an active region consisting of one or more InGaN quantum wells sandwiched between thicker layers of GaN, called cladding layers. By varying the relative In/Ga fraction in the InGaN quantum wells, the light emission can in theory be varied from violet to amber.

Aluminium gallium nitride (AlGaIn) of varying Al/Ga fraction can be used to manufacture the cladding and quantum well layers for ultraviolet LEDs, but these devices have not yet reached the level of efficiency and technological maturity of InGaN/GaN blue/green devices. If unalloyed GaN is used in this case to form the active quantum well layers, the device emits near-ultraviolet light with a peak wavelength centred around 365 nm. Green LEDs manufactured from the InGaN/GaN system are far more efficient and brighter than green LEDs produced with non-nitride material systems, but practical devices still exhibit efficiency too low for high-brightness applications.^[citation needed]

With AlGaIn and AlGaInN, even shorter wavelengths are achievable. Near-UV emitters at wavelengths around 360–395 nm are already cheap and often encountered, for example, as black light lamp replacements for inspection of anti-counterfeiting UV watermarks in documents and bank notes, and for UV curing. Substantially more expensive, shorter-wavelength diodes are commercially available for wavelengths down to 240 nm.^[14] As the photosensitivity of microorganisms approximately matches the absorption spectrum of DNA, with a peak at about 260 nm, UV LED emitting at 250–270 nm are expected in prospective disinfection and sterilization devices. Recent research has shown that commercially available UVA LEDs (365 nm) are already effective disinfection and sterilization devices.^[15] UV-C wavelengths were obtained in laboratories using aluminium nitride (210 nm),^[16] boron nitride (215 nm)^{[17][18]} and diamond (235 nm).^[19]

White LEDs

[edit]

There are two primary ways of producing white light-emitting diodes. One is to use individual LEDs that emit three primary colors—red, green and blue—and then mix all the colors to form white light. The other is to use a phosphor material to convert monochromatic light from a blue or UV LED to broad-spectrum white light, similar to a fluorescent lamp. The yellow phosphor is cerium-doped YAG crystals suspended in the

package or coated on the LED. This YAG phosphor causes white LEDs to appear yellow when off, and the space between the crystals allow some blue light to pass through in LEDs with partial phosphor conversion. Alternatively, white LEDs may use other phosphors like manganese(IV)-doped potassium fluorosilicate (PFS) or other engineered phosphors. PFS assists in red light generation, and is used in conjunction with conventional Ce:YAG phosphor.


In LEDs with PFS phosphor, some blue light passes through the phosphors, the Ce:YAG phosphor converts blue light to green and red (yellow) light, and the PFS phosphor converts blue light to red light. The color, emission spectrum or color temperature of white phosphor converted and other phosphor converted LEDs can be controlled by changing the concentration of several phosphors that form a phosphor blend used in an LED package.^{[20][21][22][23]}

The 'whiteness' of the light produced is engineered to suit the human eye. Because of metamerism, it is possible to have quite different spectra that appear white. The appearance of objects illuminated by that light may vary as the spectrum varies. This is the issue of color rendition, quite separate from color temperature. An orange or cyan object could appear with the wrong color and much darker as the LED or phosphor does not emit the wavelength it reflects. The best color rendition LEDs use a mix of phosphors, resulting in less efficiency and better color rendering.^[citation needed]


The first white light-emitting diodes (LEDs) were offered for sale in the autumn of 1996.^[24] Nichia made some of the first white LEDs which were based on blue LEDs with Ce:YAG phosphor.^[25] Ce:YAG is often grown using the Czochralski method.^[26]

RGB systems

[edit]

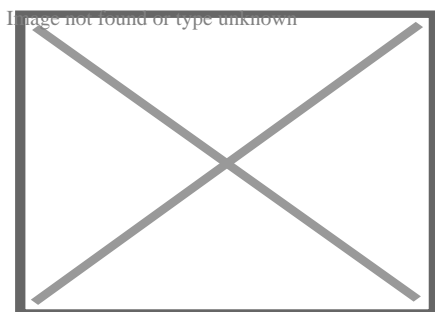

Combined spectral curves for blue, yellow-green, and high-brightness red solid-state semiconductor LEDs. FWHM spectral bandwidth is approximately 24–27 nm for all three colors.

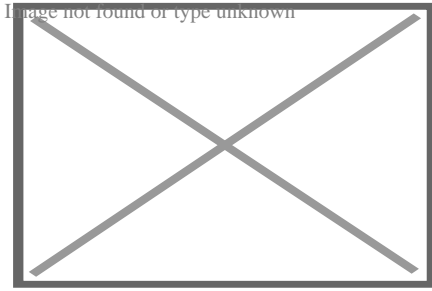

An RGB LED projecting red, green, and blue onto a surface

Mixing red, green, and blue sources to produce white light needs electronic circuits to control the blending of the colors. Since LEDs have slightly different emission patterns, the color balance may change depending on the angle of view, even if the RGB sources are in a single package, so RGB diodes are seldom used to produce white lighting. Nonetheless, this method has many applications because of the flexibility of mixing different colors,^[27] and in principle, this mechanism also has higher quantum efficiency in producing white light.^[28]

There are several types of multicolor white LEDs: di-, tri-, and tetrachromatic white LEDs. Several key factors that play among these different methods include color stability, color rendering capability, and luminous efficacy. Often, higher efficiency means lower color rendering, presenting a trade-off between the luminous efficacy and color rendering. For example, the dichromatic white LEDs have the best luminous efficacy (120 lm/W), but the lowest color rendering capability. Although tetrachromatic white LEDs have excellent color rendering capability, they often have poor luminous efficacy. Trichromatic white LEDs are in between, having both good luminous efficacy (>70 lm/W) and fair color rendering capability.^[29]


One of the challenges is the development of more efficient green LEDs. The theoretical maximum for green LEDs is 683 lumens per watt but as of 2010 few green LEDs exceed even 100 lumens per watt. The blue and red LEDs approach their theoretical limits.^[citation needed]

Multicolor LEDs offer a means to form light of different colors. Most perceivable colors can be formed by mixing different amounts of three primary colors. This allows precise dynamic color control. Their emission power decays exponentially with rising temperature,^[30] resulting in a substantial change in color stability. Such problems inhibit industrial use. Multicolor LEDs without phosphors cannot provide good color rendering because each LED is a narrowband source. LEDs without phosphor, while a poorer solution for general lighting, are the best solution for displays, either backlight of LCD, or direct LED based pixels.

Dimming a multicolor LED source to match the characteristics of incandescent lamps is difficult because manufacturing variations, age, and temperature change the actual color value output. To emulate the appearance of dimming incandescent lamps may require a feedback system with color sensor to actively monitor and control the color.^[31]

Phosphor-based LEDs

[edit]

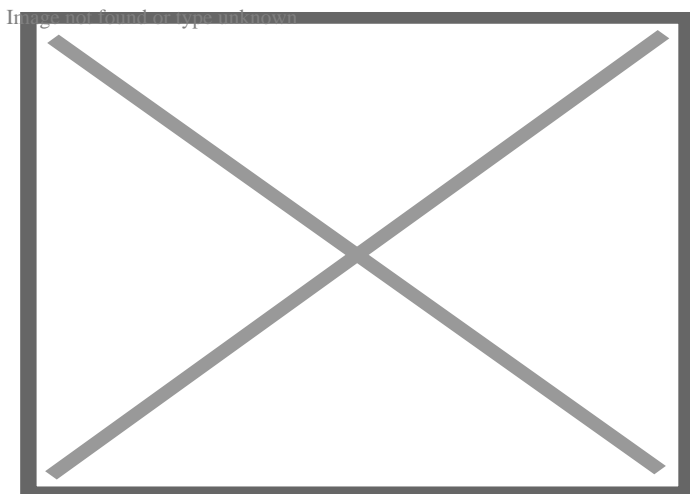


Spectrum of a white LED showing blue light directly emitted by the GaN-based LED (peak at about 465 nm) and the more broadband Stokes-shifted light emitted by the Ce^{3+} :YAG phosphor, which emits at roughly 500–700 nm

This method involves coating LEDs of one color (mostly blue LEDs made of InGaN) with phosphors of different colors to form white light; the resultant LEDs are called phosphor-based or phosphor-converted white LEDs (pcLEDs).^[32] A fraction of the blue light undergoes the Stokes shift, which transforms it from shorter wavelengths to longer. Depending on the original LED's color, various color phosphors are used. Using several phosphor layers of distinct colors broadens the emitted spectrum, effectively raising the color rendering index (CRI).^[33]

Phosphor-based LEDs have efficiency losses due to heat loss from the Stokes shift and also other phosphor-related issues. Their luminous efficacies compared to normal LEDs depend on the spectral distribution of the resultant light output and the original wavelength of the LED itself. For example, the luminous efficacy of a typical YAG yellow phosphor based white LED ranges from 3 to 5 times the luminous efficacy of the original blue LED because of the human eye's greater sensitivity to yellow than to blue (as modeled in the luminosity function).

Due to the simplicity of manufacturing, the phosphor method is still the most popular method for making high-intensity white LEDs. The design and production of a light source or light fixture using a monochrome emitter with phosphor conversion is simpler and cheaper than a complex RGB system, and the majority of high-intensity white LEDs presently on the market are manufactured using phosphor light conversion.^[citation needed]

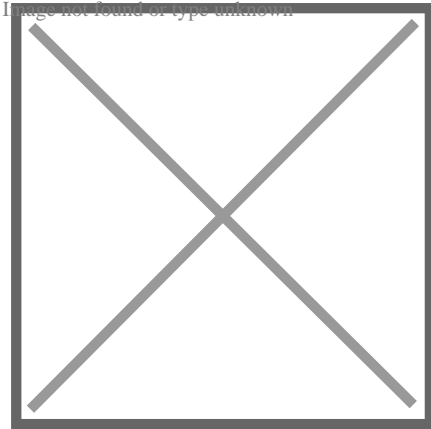

1 watt 9 volt three chips SMD phosphor based white LED

Among the challenges being faced to improve the efficiency of LED-based white light sources is the development of more efficient phosphors. As of 2010, the most efficient yellow phosphor is still the YAG phosphor, with less than 10% Stokes shift loss. Losses attributable to internal optical losses due to re-absorption in the LED chip and in the LED packaging itself account typically for another 10% to 30% of efficiency loss. Currently, in the area of phosphor LED development, much effort is being spent on optimizing these devices to higher light output and higher operation temperatures. For instance, the efficiency can be raised by adapting better package design or by using a more suitable type of phosphor. Conformal coating process is frequently used to address the issue of varying phosphor thickness.^[citation needed]

Some phosphor-based white LEDs encapsulate InGaN blue LEDs inside phosphor-coated epoxy. Alternatively, the LED might be paired with a remote phosphor, a preformed polycarbonate piece coated with the phosphor material. Remote phosphors provide more diffuse light, which is desirable for many applications. Remote phosphor designs are also more tolerant of variations in the LED emissions spectrum. A common yellow phosphor material is cerium-doped yttrium aluminium garnet ($\text{Ce}^{3+}:\text{YAG}$).^[citation needed]


White LEDs can also be made by coating near-ultraviolet (NUV) LEDs with a mixture of high-efficiency europium-based phosphors that emit red and blue, plus copper and aluminium-doped zinc sulfide ($\text{ZnS}:\text{Cu, Al}$) that emits green. This is a method analogous to the way fluorescent lamps work. This method is less efficient than blue LEDs with YAG:Ce phosphor, as the Stokes shift is larger, so more energy is converted to heat, but yields light with better spectral characteristics, which render color better. Due to the higher radiative output of the ultraviolet LEDs than of the blue ones, both methods offer comparable brightness. A concern is that UV light may leak from a malfunctioning light source and cause harm to human eyes or skin.^[citation needed]

A new style of wafers composed of gallium-nitride-on-silicon (GaN-on-Si) is being used to produce white LEDs using 200-mm silicon wafers. This avoids the typical costly sapphire substrate in relatively small 100- or 150-mm wafer sizes.^[34] The sapphire

apparatus must be coupled with a mirror-like collector to reflect light that would otherwise be wasted. It was predicted that since 2020, 40% of all GaN LEDs are made with GaN-on-Si. Manufacturing large sapphire material is difficult, while large silicon material is cheaper and more abundant. LED companies shifting from using sapphire to silicon should be a minimal investment.[³⁵]

Mixed white LEDs

[edit]

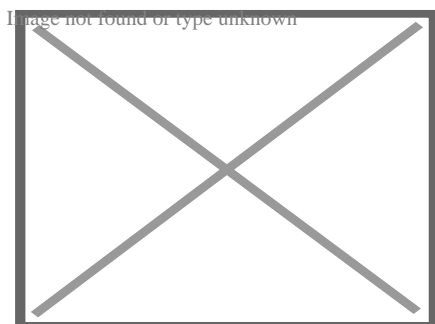

Tunable white LED array in a floodlight

There are RGBW LEDs that combine RGB units with a phosphor white LED on the market. Doing so retains the extremely tunable color of RGB LED, but allows color rendering and efficiency to be optimized when a color close to white is selected.[³⁶]

Some phosphor white LED units are "tunable white", blending two extremes of color temperatures (commonly 2700K and 6500K) to produce intermediate values. This feature allows users to change the lighting to suit the current use of a multifunction room. [³⁷] As illustrated by a straight line on the chromaticity diagram, simple two-white blends will have a pink bias, becoming most severe in the middle. A small amount of green light, provided by another LED, could correct the problem.[³⁸] Some products are RGBWW, i.e. RGBW with tunable white.[³⁹]

A final class of white LED with mixed light is dim-to-warm. These are ordinary 2700K white LED bulbs with a small red LED that turns on when the bulb is dimmed. Doing so makes the color warmer, emulating an incandescent light bulb.[³⁹]

Other white LEDs

[edit]

Another method used to produce experimental white light LEDs used no phosphors at all and was based on homoepitaxially grown zinc selenide (ZnSe) on a ZnSe substrate that simultaneously emitted blue light from its active region and yellow light from the

substrate.^[40]

Organic light-emitting diodes (OLEDs)

[edit]


Main article: OLED

In an organic light-emitting diode (OLED), the electroluminescent material composing the emissive layer of the diode is an organic compound. The organic material is electrically conductive due to the delocalization of pi electrons caused by conjugation over all or part of the molecule, and the material therefore functions as an organic semiconductor.^[41] The organic materials can be small organic molecules in a crystalline phase, or polymers.^[42]


The potential advantages of OLEDs include thin, low-cost displays with a low driving voltage, wide viewing angle, and high contrast and color gamut.^[43] Polymer LEDs have the added benefit of printable and flexible displays.^{[44][45][46]} OLEDs have been used to make visual displays for portable electronic devices such as cellphones, digital cameras, lighting and televisions.^{[42][43]}

Types

[edit]

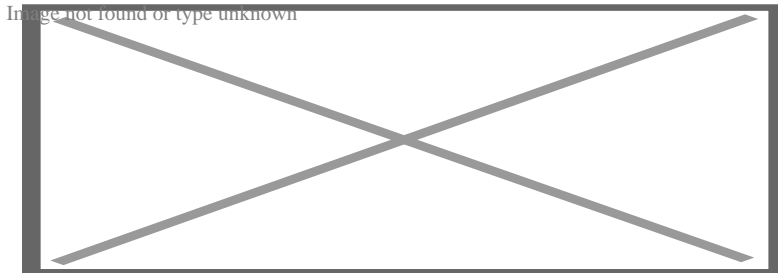

LEDs are produced in a variety of shapes and sizes. The color of the plastic lens is often the same as the actual color of light emitted, but not always. For instance, purple plastic is often used for infrared LEDs, and most blue devices have colorless housings. Modern high-power LEDs such as those used for lighting and backlighting are generally found in surface-mount technology (SMT) packages (not shown).

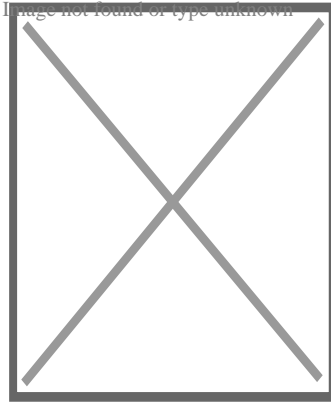

A variety of different diffused 5 mm THT-LEDs

- Red, 650 – 625nm
- Orange, 600 – 610nm
- Yellow, 587 – 591nm
- Green, 570 – 575nm
- Blue, 465 – 467nm
- Purple, 395 – 400nm

LEDs are made in different packages for different applications. A single or a few LED junctions may be packed in one miniature device for use as an indicator or pilot lamp. An LED array may include controlling circuits within the same package, which may range from a simple resistor, blinking or color changing control, or an addressable controller for RGB devices. Higher-powered white-emitting devices will be mounted on heat sinks and will be used for illumination. Alphanumeric displays in dot matrix or bar formats are widely available. Special packages permit connection of LEDs to optical fibers for high-speed data communication links.

Miniature

[edit]


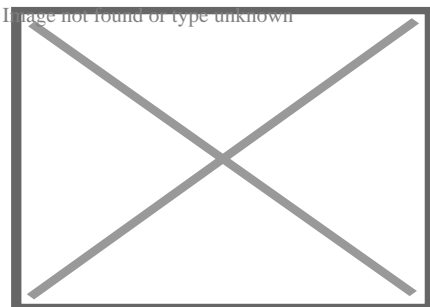


Image of miniature surface mount LEDs in most common sizes. They can be much smaller than a traditional 5 mm lamp type LED, shown on the upper left corner.

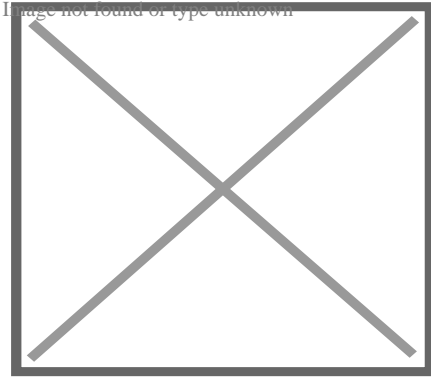

Very small (1.6×1.6×0.35 mm) red, green, and blue surface mount miniature LED package with gold wire bonding details


These are mostly single-die LEDs used as indicators, and they come in various sizes from 1.8 mm to 10 mm, through-hole and surface mount packages.^[47] Typical current ratings range from around 1 mA to above 20 mA. LED's can be soldered to a flexible PCB strip to form LED tape popularly used for decoration.

Common package shapes include round, with a domed or flat top, rectangular with a flat top (as used in bar-graph displays), and triangular or square with a flat top. The encapsulation may also be clear or tinted to improve contrast and viewing angle. Infrared devices may have a black tint to block visible light while passing infrared radiation, such as the Osram SFH 4546.^[48]

5 V and 12 V LEDs are ordinary miniature LEDs that have a series resistor for direct connection to a 5 V or 12 V supply.^[49]

High-power

[edit]

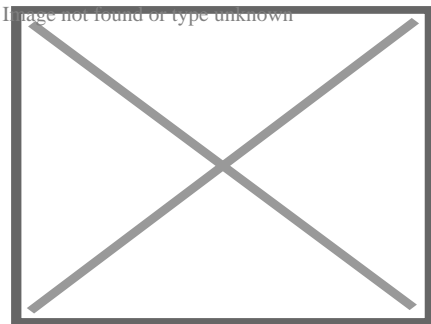

High-power light-emitting diodes attached to an LED star base (Luxeon, Lumileds)

See also: Solid-state lighting, LED lamp, and Thermal management of high-power LEDs

High-power LEDs (HP-LEDs) or high-output LEDs (HO-LEDs) can be driven at currents from hundreds of mA to more than an ampere, compared with the tens of mA for other LEDs. Some can emit over a thousand lumens.^{[50][51]} LED power densities up to 300 W/cm² have been achieved. Since overheating is destructive, the HP-LEDs must be mounted on a heat sink to allow for heat dissipation. If the heat from an HP-LED is not removed, the device fails in seconds. One HP-LED can often replace an incandescent bulb in a flashlight, or be set in an array to form a powerful LED lamp.

Some HP-LEDs in this category are the Nichia 19 series, Lumileds Rebel Led, Osram Opto Semiconductors Golden Dragon, and Cree X-lamp. As of September 2009, some HP-LEDs manufactured by Cree exceed 105 lm/W.^[52]

Examples for Haitz's law—which predicts an exponential rise in light output and efficacy of LEDs over time—are the CREE XP-G series LED, which achieved 105 lm/W in 2009^[52] and the Nichia 19 series with a typical efficacy of 140 lm/W, released in 2010.^[53]

AC-driven


[edit]

LEDs developed by Seoul Semiconductor can operate on AC power without a DC converter. For each half-cycle, part of the LED emits light and part is dark, and this is reversed during the next half-cycle. The efficiency of this type of HP-LED is typically 40 lm/W.^[54] A large number of LED elements in series may be able to operate directly from line voltage. In 2009, Seoul Semiconductor released a high DC voltage LED, named 'Acrich MJT', capable of being driven from AC power with a simple controlling circuit. The low-power dissipation of these LEDs affords them more flexibility than the original AC LED design.^[55]

Strip

[edit]

This section is an excerpt from LED strip light.[edit]

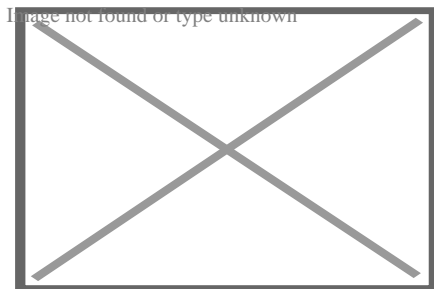

Several LED spots being reflected as continuous lighting strip

An LED strip, tape, or ribbon light is a flexible circuit board populated by surface-mount light-emitting diodes (SMD LEDs) and other components that usually comes with an adhesive backing. Traditionally, strip lights had been used solely in accent lighting, backlighting, task lighting, and decorative lighting applications, such as cove lighting. LED strip lights originated in the early 2000s. Since then, increased luminous efficacy and higher-power SMDs have allowed them to be used in applications such as high brightness task lighting, fluorescent and halogen lighting fixture replacements, indirect lighting applications, ultraviolet inspection during manufacturing processes, set and costume design, and growing plants.


Application-specific

[edit]


This section **needs additional citations for verification**. Please help improve this article by adding citations to reliable sources in this section. Unsourced material may be challenged and removed.



Find sources: "Light-emitting diode" – news · newspapers · books · scholar · JSTOR (October 2020) *(Learn how and when to remove this message)*

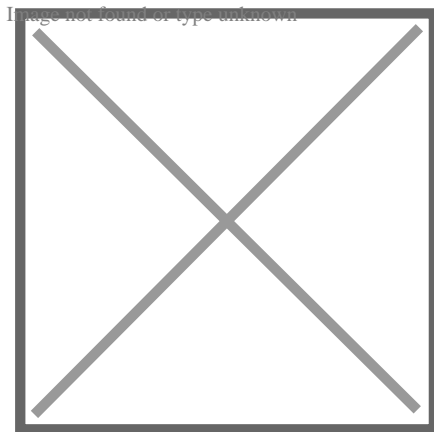

RGB-SMD-LED

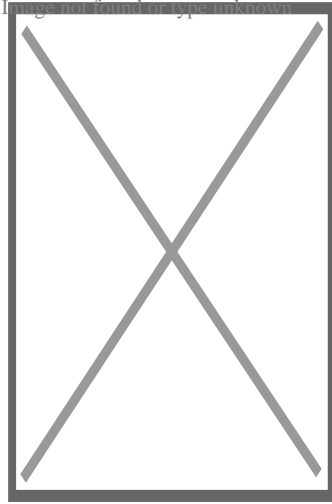

Composite image of an 11 × 44 LED matrix label name tag display using 1608/0603-type SMD LEDs. Top: A little over half of the 21 × 86 mm display. Center: Close-up of LEDs in ambient light. Bottom: LEDs in their own red light.

Flashing

Flashing LEDs are used as attention seeking indicators without requiring external electronics. Flashing LEDs resemble standard LEDs but they contain an integrated voltage regulator and a multivibrator circuit that causes the LED to flash with a typical period of one second. In diffused lens LEDs, this circuit is visible as a small black dot. Most flashing LEDs emit light of one color, but more sophisticated devices can flash between multiple colors and even fade through a color sequence using RGB color mixing. Flashing SMD LEDs in the 0805 and other size formats have been available since early 2019.

Flickering

Integrated electronics Simple electronic circuits integrated into the LED package have been around since at least 2011 which produce a random LED intensity pattern reminiscent of a flickering candle.^[56] Reverse engineering in 2024 has suggested that some flickering LEDs with automatic sleep and wake modes might be using an integrated 8-bit microcontroller for such functionality.^[57]

Bi-color

Bi-color LEDs contain two different LED emitters in one case. There are two types of these. One type consists of two dies connected to the same two leads antiparallel to each other. Current flow in one direction emits one color, and current in the opposite direction emits the other color. The other type consists of two dies with separate leads for both dies and another lead for common anode or cathode so that they can be controlled independently. The most common bi-color combination is red/traditional green. Others include amber/traditional green, red/pure green, red/blue, and blue/pure green.

RGB tri-color

Tri-color LEDs contain three different LED emitters in one case. Each emitter is connected to a separate lead so they can be controlled independently. A four-lead arrangement is typical with one common lead (anode or cathode) and an additional

lead for each color. Others have only two leads (positive and negative) and have a built-in electronic controller. RGB LEDs consist of one red, one green, and one blue LED.^[58] By independently adjusting each of the three, RGB LEDs are capable of producing a wide color gamut. Unlike dedicated-color LEDs, these do not produce pure wavelengths. Modules may not be optimized for smooth color mixing.

Decorative-multicolor

Decorative-multicolor LEDs incorporate several emitters of different colors supplied by only two lead-out wires. Colors are switched internally by varying the supply voltage.

Alphanumeric

Alphanumeric LEDs are available in seven-segment, starburst, and dot-matrix format. Seven-segment displays handle all numbers and a limited set of letters. Starburst displays can display all letters. Dot-matrix displays typically use 5×7 pixels per character. Seven-segment LED displays were in widespread use in the 1970s and 1980s, but rising use of liquid crystal displays, with their lower power needs and greater display flexibility, has reduced the popularity of numeric and alphanumeric LED displays.

Digital RGB

Digital RGB addressable LEDs contain their own "smart" control electronics. In addition to power and ground, these provide connections for data-in, data-out, clock and sometimes a strobe signal. These are connected in a daisy chain, which allows individual LEDs in a long LED strip light to be easily controlled by a microcontroller. Data sent to the first LED of the chain can control the brightness and color of each LED independently of the others. They are used where a combination of maximum control and minimum visible electronics are needed such as strings for Christmas and LED matrices. Some even have refresh rates in the kHz range, allowing for basic video applications. These devices are known by their part number (WS2812 being common) or a brand name such as NeoPixel.

Filament

An LED filament consists of multiple LED chips connected in series on a common longitudinal substrate that forms a thin rod reminiscent of a traditional incandescent filament.^[59] These are being used as a low-cost decorative alternative for traditional light bulbs that are being phased out in many countries. The filaments use a rather high voltage, allowing them to work efficiently with mains voltages. Often a simple rectifier and capacitive current limiting are employed to create a low-cost replacement for a traditional light bulb without the complexity of the low voltage, high current converter that single die LEDs need.^[60] Usually, they are packaged in bulb similar to the lamps they were designed to replace, and filled with inert gas at slightly lower than ambient pressure to remove heat efficiently and prevent corrosion.

Chip-on-board arrays

Surface-mounted LEDs are frequently produced in chip on board (COB) arrays, allowing better heat dissipation than with a single LED of comparable luminous output.^[61] The LEDs can be arranged around a cylinder, and are called "corn cob

lights" because of the rows of yellow LEDs.^[62]

Considerations for use


[edit]

- Efficiency: LEDs emit more lumens per watt than incandescent light bulbs.^[63] The efficiency of LED lighting fixtures is not affected by shape and size, unlike fluorescent light bulbs or tubes.
- Size: LEDs can be very small (smaller than 2 mm^2 ^[64]) and are easily attached to printed circuit boards.

Power sources

[edit]

Main article: LED power sources



Simple LED circuit with resistor for current limiting

The current in an LED or other diodes rises exponentially with the applied voltage (see Shockley diode equation), so a small change in voltage can cause a large change in current. Current through the LED must be regulated by an external circuit such as a constant current source to prevent damage. Since most common power supplies are (nearly) constant-voltage sources, LED fixtures must include a power converter, or at least a current-limiting resistor. In some applications, the internal resistance of small batteries is sufficient to keep current within the LED rating.^[citation needed]

LEDs are sensitive to voltage. They must be supplied with a voltage above their threshold voltage and a current below their rating. Current and lifetime change greatly with a small change in applied voltage. They thus require a current-regulated supply (usually just a series resistor for indicator LEDs).^[65]

Efficiency droop: The efficiency of LEDs decreases as the electric current increases. Heating also increases with higher currents, which compromises LED lifetime. These effects put practical limits on the current through an LED in high power applications.^[66]

Electrical polarity

[edit]

Main article: Electrical polarity of LEDs

Unlike a traditional incandescent lamp, an LED will light only when voltage is applied in the forward direction of the diode. No current flows and no light is emitted if voltage is applied in the reverse direction. If the reverse voltage exceeds the breakdown voltage, which is typically about five volts, a large current flows and the LED will be damaged. If the reverse current is sufficiently limited to avoid damage, the reverse-conducting LED is a useful noise diode.^[*citation needed*]

By definition, the energy band gap of any diode is higher when reverse-biased than when forward-biased. Because the band gap energy determines the wavelength of the light emitted, the color cannot be the same when reverse-biased. The reverse breakdown voltage is sufficiently high that the emitted wavelength cannot be similar enough to still be visible. Though dual-LED packages exist that contain a different color LED in each direction, it is not expected that any single LED element can emit visible light when reverse-biased.^[*citation needed*]

It is not known if any zener diode could exist that emits light only in reverse-bias mode. Uniquely, this type of LED would conduct when connected backwards.

Appearance

[edit]

- Color: LEDs can emit light of an intended color without using any color filters as traditional lighting methods need. This is more efficient and can lower initial costs.
- Cool light: In contrast to most light sources, LEDs radiate very little heat in the form of IR that can cause damage to sensitive objects or fabrics. Wasted energy is dispersed as heat through the base of the LED.
- Color rendition: Most cool-white LEDs have spectra that differ significantly from a black body radiator like the sun or an incandescent light. The spike at 460 nm and dip at 500 nm can make the color of objects appear differently under cool-white LED illumination than sunlight or incandescent sources, due to metamerism.^[67] red surfaces being rendered particularly poorly by typical phosphor-based cool-white LEDs. The same is true with green surfaces. The quality of color rendition of an LED is measured by the Color Rendering Index (CRI).
- Dimming: LEDs can be dimmed either by pulse-width modulation or lowering the forward current.^[68] This pulse-width modulation is why LED lights, particularly headlights on cars, when viewed on camera or by some people, seem to flash or flicker. This is a type of stroboscopic effect.

Light properties

[edit]

- Switch on time: LEDs light up extremely quickly. A typical red indicator LED achieves full brightness in under a microsecond.^[69] LEDs used in communications devices can have even faster response times.
- Focus: The solid package of the LED can be designed to focus its light. Incandescent and fluorescent sources often require an external reflector to collect light and direct it in a usable manner. For larger LED packages total internal reflection (TIR) lenses are often used to the same effect. When large quantities of light are needed, many light sources such as LED chips are usually deployed, which are difficult to focus or collimate on the same target.
- Area light source: Single LEDs do not approximate a point source of light giving a spherical light distribution, but rather a lambertian distribution. So, LEDs are difficult to apply to uses needing a spherical light field. Different fields of light can be manipulated by the application of different optics or "lenses". LEDs cannot provide divergence below a few degrees.^[70]

Reliability

[edit]

- Shock resistance: LEDs, being solid-state components, are difficult to damage with external shock, unlike fluorescent and incandescent bulbs, which are fragile.^[71]
- Thermal runaway: Parallel strings of LEDs will not share current evenly due to the manufacturing tolerances in their forward voltage. Running two or more strings from a single current source may result in LED failure as the devices warm up. If forward voltage binning is not possible, a circuit is required to ensure even distribution of current between parallel strands.^[72]
- Slow failure: LEDs mainly fail by dimming over time, rather than the abrupt failure of incandescent bulbs.^[73]
- Lifetime: LEDs can have a relatively long useful life. One report estimates 35,000 to 50,000 hours of useful life, though time to complete failure may be shorter or longer.^[74] Fluorescent tubes typically are rated at about 10,000 to 25,000 hours, depending partly on the conditions of use, and incandescent light bulbs at 1,000 to 2,000 hours. Several DOE demonstrations have shown that reduced maintenance costs from this extended lifetime, rather than energy savings, is the primary factor in determining the payback period for an LED product.^[75]
- Cycling: LEDs are ideal for uses subject to frequent on-off cycling, unlike incandescent and fluorescent lamps that fail faster when cycled often, or high-intensity discharge lamps (HID lamps) that require a long time to warm up to full output and to cool down before they can be lighted again if they are being restarted.
- Temperature dependence: LED performance largely depends on the ambient temperature of the operating environment – or thermal management properties. Overdriving an LED in high ambient temperatures may result in overheating the LED package, eventually leading to device failure. An adequate heat sink is needed to maintain long life. This is especially important in automotive, medical, and military uses where devices must operate over a wide range of temperatures, and

require low failure rates.

Manufacturing

[edit]

LED manufacturing involves multiple steps, including epitaxy, chip processing, chip separation, and packaging.^[76]

In a typical LED manufacturing process, encapsulation is performed after probing, dicing, die transfer from wafer to package, and wire bonding or flip chip mounting,^[77] perhaps using indium tin oxide, a transparent electrical conductor. In this case, the bond wire(s) are attached to the ITO film that has been deposited in the LEDs.

Flip chip circuit on board (COB) is a technique that can be used to manufacture LEDs.^[78]

Colors and materials

[edit]


Conventional LEDs are made from a variety of inorganic semiconductor materials. The following table shows the available colors with wavelength range, voltage drop and material:

	Color	Wavelength (nm)	Voltage (V)	Semiconductor material
	Infrared	$? > 760$	$? V < 1.9$	Gallium arsenide (GaAs) Aluminium gallium arsenide (AlGaAs)
	Red	$610 < ? < 760$	$1.63 < ? V < 2.03$	Aluminium gallium arsenide (AlGaAs) Gallium arsenide phosphide (GaAsP) Aluminium gallium indium phosphide (AlGaInP) Gallium(III) phosphide (GaP)
	Orange	$590 < ? < 610$	$2.03 < ? V < 2.10$	Gallium arsenide phosphide (GaAsP) Aluminium gallium indium phosphide (AlGaInP) Gallium(III) phosphide (GaP)

Yellow	$570 < \lambda < 590$	$2.10 < V < 2.18$	Gallium arsenide phosphide (GaAsP) Aluminium gallium indium phosphide (AlGaInP) Gallium(III) phosphide (GaP)
Green	$500 < \lambda < 570$	$1.9^{[79]} < V < 4.0$	Indium gallium nitride (InGaN) / Gallium(III) nitride (GaN) Gallium(III) phosphide (GaP) Aluminium gallium indium phosphide (AlGaInP) Aluminium gallium phosphide (AlGaP)
Blue	$450 < \lambda < 500$	$2.48 < V < 3.7$	Zinc selenide (ZnSe) Indium gallium nitride (InGaN) Silicon carbide (SiC) as substrate Silicon (Si) as substrate — (under development)
Violet	$400 < \lambda < 450$	$2.76 < V < 4.0$	Indium gallium nitride (InGaN)
Purple	multiple types	$2.48 < V < 3.7$	Dual blue/red LEDs, blue with red phosphor, or white with purple plastic
Ultraviolet	$\lambda < 400$	$3.1 < V < 4.4$	Diamond (235 nm) ^[80] Boron nitride (215 nm) ^[81] ^[82] Aluminium nitride (AlN) (210 nm) ^[16] Aluminium gallium nitride (AlGaInN) Aluminium gallium indium nitride (AlGaInN) — (down to 210 nm) ^[83]
White	Broad spectrum	$2.7 < V < 3.5$	Blue diode with yellow phosphor or violet/UV diode with multi-color phosphor

Applications

[edit]

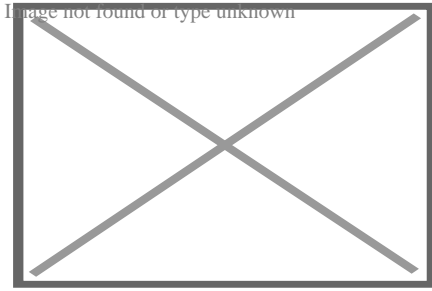

Daytime running light LEDs of an automobile

LED uses fall into five major categories:

- Visual signals where light goes more or less directly from the source to the human eye, to convey a message or meaning
- Illumination where light is reflected from objects to give visual response of these objects
- Measuring and interacting with processes involving no human vision^[84]
- Narrow band light sensors where LEDs operate in a reverse-bias mode and respond to incident light, instead of emitting light^{[85][86][87][88]}
- Indoor cultivation, including cannabis.^[89]

The application of LEDs in horticulture has revolutionized plant cultivation by providing energy-efficient, customizable lighting solutions that optimize plant growth and development.^[90] LEDs offer precise control over light spectra, intensity, and photoperiods, enabling growers to tailor lighting conditions to the specific needs of different plant species and growth stages. This technology enhances photosynthesis, improves crop yields, and reduces energy costs compared to traditional lighting systems. Additionally, LEDs generate less heat, allowing closer placement to plants without risking thermal damage, and contribute to sustainable farming practices by lowering carbon footprints and extending growing seasons in controlled environments.^[91] Light spectrum affects growth, metabolite profile, and resistance against fungal phytopathogens of *Solanum lycopersicum* seedlings.^[92] LEDs can also be used in micropropagation.^[93]

Indicators and signs


[edit]



This section does not cite any sources. Please help improve this section by adding citations to reliable sources. Unsourced material may be challenged and removed. (October 2020) (*Learn how and when to remove this message*)

The low energy consumption, low maintenance and small size of LEDs has led to uses as status indicators and displays on a variety of equipment and installations. Large-area LED displays are used as stadium displays, dynamic decorative displays, and dynamic message signs on freeways. Thin, lightweight message displays are used at airports and

railway stations, and as destination displays for trains, buses, trams, and ferries.

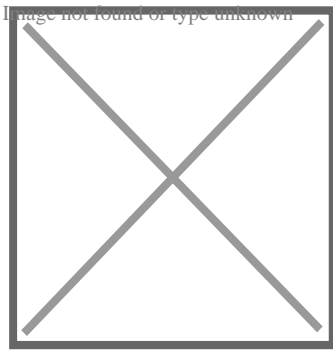

Red and green LED traffic signals

One-color light is well suited for traffic lights and signals, exit signs, emergency vehicle lighting, ships' navigation lights, and LED-based Christmas lights

Because of their long life, fast switching times, and visibility in broad daylight due to their high output and focus, LEDs have been used in automotive brake lights and turn signals. The use in brakes improves safety, due to a great reduction in the time needed to light fully, or faster rise time, about 0.1 second faster^[citation needed] than an incandescent bulb. This gives drivers behind more time to react. In a dual intensity circuit (rear markers and brakes) if the LEDs are not pulsed at a fast enough frequency, they can create a phantom array, where ghost images of the LED appear if the eyes quickly scan across the array. White LED headlamps are beginning to appear. Using LEDs has styling advantages because LEDs can form much thinner lights than incandescent lamps with parabolic reflectors.

Due to the relative cheapness of low output LEDs, they are also used in many temporary uses such as glowsticks and throwies. Artists have also used LEDs for LED art.

Lighting

[edit]

Main article: LED lamp

With the development of high-efficiency and high-power LEDs, it has become possible to use LEDs in lighting and illumination. To encourage the shift to LED lamps and other high-efficiency lighting, in 2008 the US Department of Energy created the L Prize competition. The Philips Lighting North America LED bulb won the first competition on August 3, 2011, after successfully completing 18 months of intensive field, lab, and product testing.^[94]

Efficient lighting is needed for sustainable architecture. As of 2011, some LED bulbs provide up to 150 lm/W and even inexpensive low-end models typically exceed 50 lm/W,

so that a 6-watt LED could achieve the same results as a standard 40-watt incandescent bulb. The lower heat output of LEDs also reduces demand on air conditioning systems. Worldwide, LEDs are rapidly adopted to displace less effective sources such as incandescent lamps and CFLs and reduce electrical energy consumption and its associated emissions. Solar powered LEDs are used as street lights and in architectural lighting.


The mechanical robustness and long lifetime are used in automotive lighting on cars, motorcycles, and bicycle lights. LED street lights are employed on poles and in parking garages. In 2007, the Italian village of Torraca was the first place to convert its street lighting to LEDs.^[95]

Cabin lighting on recent^[when?] Airbus and Boeing jetliners uses LED lighting. LEDs are also being used in airport and heliport lighting. LED airport fixtures currently include medium-intensity runway lights, runway centerline lights, taxiway centerline and edge lights, guidance signs, and obstruction lighting.


LEDs are also used as a light source for DLP projectors, and to backlight newer LCD television (referred to as LED TV), computer monitor (including laptop) and handheld device LCDs, succeeding older CCFL-backlit LCDs although being superseded by OLED screens. RGB LEDs raise the color gamut by as much as 45%. Screens for TV and computer displays can be made thinner using LEDs for backlighting.^[96]

LEDs are small, durable and need little power, so they are used in handheld devices such as flashlights. LED strobe lights or camera flashes operate at a safe, low voltage, instead of the 250+ volts commonly found in xenon flashlamp-based lighting. This is especially useful in cameras on mobile phones, where space is at a premium and bulky voltage-raising circuitry is undesirable.

LEDs are used for infrared illumination in night vision uses including security cameras. A ring of LEDs around a video camera, aimed forward into a retroreflective background, allows chroma keying in video productions.

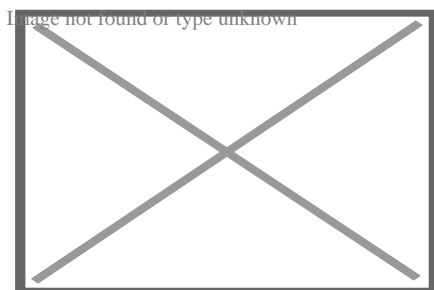

LED for miners, to increase visibility inside mines

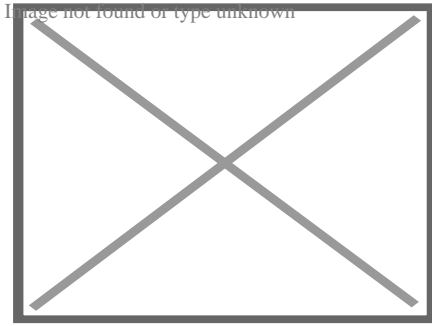

Los Angeles Vincent Thomas Bridge illuminated with blue LEDs

LEDs are used in mining operations, as cap lamps to provide light for miners. Research has been done to improve LEDs for mining, to reduce glare and to increase illumination, reducing risk of injury to the miners.^[97]

LEDs are increasingly finding uses in medical and educational applications, for example as mood enhancement.^[98] NASA has even sponsored research for the use of LEDs to promote health for astronauts.^[99]

Data communication and other signalling

[edit]

See also: Li-Fi, fibre optics, Visible light communication, and Optical disc

Light can be used to transmit data and analog signals. For example, lighting white LEDs can be used in systems assisting people to navigate in closed spaces while searching necessary rooms or objects.^[100]

Assistive listening devices in many theaters and similar spaces use arrays of infrared LEDs to send sound to listeners' receivers. Light-emitting diodes (as well as semiconductor lasers) are used to send data over many types of fiber optic cable, from digital audio over TOSLINK cables to the very high bandwidth fiber links that form the Internet backbone. For some time, computers were commonly equipped with IrDA interfaces, which allowed them to send and receive data to nearby machines via infrared.

Because LEDs can cycle on and off millions of times per second, very high data bandwidth can be achieved.^[101] For that reason, visible light communication (VLC) has been proposed as an alternative to the increasingly competitive radio bandwidth.^[102] VLC operates in the visible part of the electromagnetic spectrum, so data can be transmitted without occupying the frequencies of radio communications.

Machine vision systems

[edit]

Main article: Machine vision

Machine vision systems often require bright and homogeneous illumination, so features of interest are easier to process. LEDs are often used.

Barcode scanners are the most common example of machine vision applications, and many of those scanners use red LEDs instead of lasers. Optical computer mice use LEDs as a light source for the miniature camera within the mouse.

LEDs are useful for machine vision because they provide a compact, reliable source of light. LED lamps can be turned on and off to suit the needs of the vision system, and the shape of the beam produced can be tailored to match the system's requirements.

Biological detection

[edit]

The discovery of radiative recombination in aluminum gallium nitride (AlGaN) alloys by U.S. Army Research Laboratory (ARL) led to the conceptualization of UV light-emitting diodes (LEDs) to be incorporated in light-induced fluorescence sensors used for biological agent detection.^{[103][104][105]} In 2004, the Edgewood Chemical Biological Center (ECBC) initiated the effort to create a biological detector named TAC-BIO. The program capitalized on semiconductor UV optical sources (SUVOS) developed by the Defense Advanced Research Projects Agency (DARPA).^[105]

UV-induced fluorescence is one of the most robust techniques used for rapid real-time detection of biological aerosols.^[105] The first UV sensors were lasers lacking in-field-use practicality. In order to address this, DARPA incorporated SUVOS technology to create a low-cost, small, lightweight, low-power device. The TAC-BIO detector's response time was one minute from when it sensed a biological agent. It was also demonstrated that the detector could be operated unattended indoors and outdoors for weeks at a time.^[105]

Aerosolized biological particles fluoresce and scatter light under a UV light beam. Observed fluorescence is dependent on the applied wavelength and the biochemical fluorophores within the biological agent. UV induced fluorescence offers a rapid, accurate, efficient and logistically practical way for biological agent detection. This is because the use of UV fluorescence is reagentless, or a process that does not require an added chemical to produce a reaction, with no consumables, or produces no chemical byproducts.^[105]


Additionally, TAC-BIO can reliably discriminate between threat and non-threat aerosols. It was claimed to be sensitive enough to detect low concentrations, but not so sensitive that it would cause false positives. The particle-counting algorithm used in the device

converted raw data into information by counting the photon pulses per unit of time from the fluorescence and scattering detectors, and comparing the value to a set threshold.[^{106]}


The original TAC-BIO was introduced in 2010, while the second-generation TAC-BIO GEN II, was designed in 2015 to be more cost-efficient, as plastic parts were used. Its small, light-weight design allows it to be mounted to vehicles, robots, and unmanned aerial vehicles. The second-generation device could also be utilized as an environmental detector to monitor air quality in hospitals, airplanes, or even in households to detect fungus and mold.[^{107]}[^{108]}

Other applications


[edit]

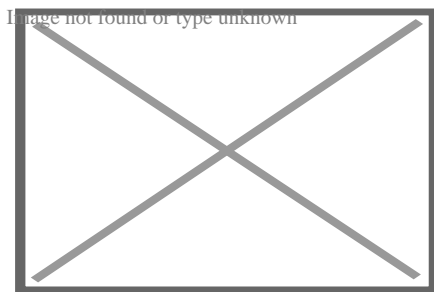


LED costume for stage performers

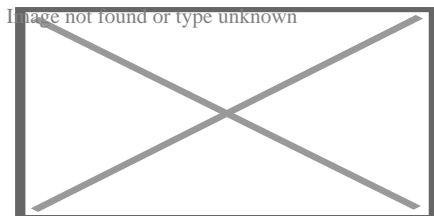


LED wallpaper by Meystyle

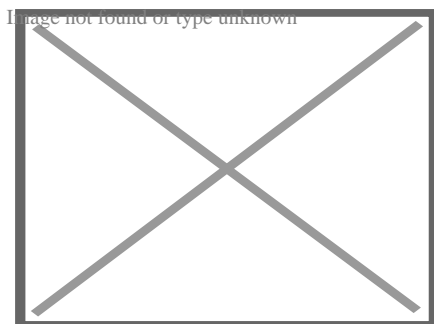

A large LED display behind a disc jockey

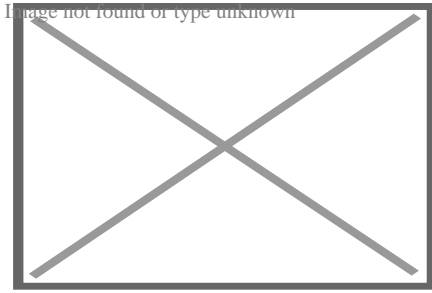

Seven-segment display that can display four digits and points

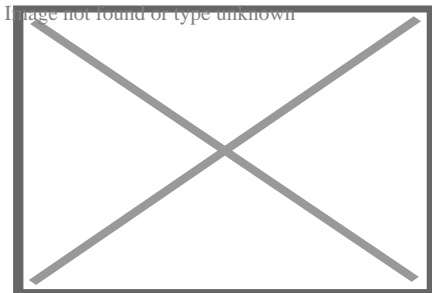

LED panel light source used in an early experiment on potato growth during Shuttle mission STS-73 to investigate the potential for growing food on future long duration missions

The light from LEDs can be modulated very quickly so they are used extensively in optical fiber and free space optics communications. This includes remote controls, such as for television sets, where infrared LEDs are often used. Opto-isolators use an LED combined with a photodiode or phototransistor to provide a signal path with electrical isolation between two circuits. This is especially useful in medical equipment where the signals from a low-voltage sensor circuit (usually battery-powered) in contact with a living organism must be electrically isolated from any possible electrical failure in a recording or monitoring device operating at potentially dangerous voltages. An optoisolator also lets information be transferred between circuits that do not share a common ground potential.

Many sensor systems rely on light as the signal source. LEDs are often ideal as a light source due to the requirements of the sensors. The Nintendo Wii's sensor bar uses infrared LEDs. Pulse oximeters use them for measuring oxygen saturation. Some flatbed scanners use arrays of RGB LEDs rather than the typical cold-cathode fluorescent lamp as the light source. Having independent control of three illuminated colors allows the scanner to calibrate itself for more accurate color balance, and there is no need for warm-up. Further, its sensors only need be monochromatic, since at any one time the page being scanned is only lit by one color of light.

Since LEDs can also be used as photodiodes, they can be used for both photo emission and detection. This could be used, for example, in a touchscreen that registers reflected light from a finger or stylus.^[109] Many materials and biological systems are sensitive to, or dependent on, light. Grow lights use LEDs to increase photosynthesis in plants.^[110]

and bacteria and viruses can be removed from water and other substances using UV LEDs for sterilization.^[15] LEDs of certain wavelengths have also been used for light therapy treatment of neonatal jaundice and acne.^[111]

UV LEDs, with spectra range of 220 nm to 395 nm, have other applications, such as water/air purification, surface disinfection, glue curing, free-space non-line-of-sight communication, high performance liquid chromatography, UV curing dye printing, phototherapy (295nm Vitamin D, 308nm Excimer lamp or laser replacement), medical/analytical instrumentation, and DNA absorption.^{[104][112]}

LEDs have also been used as a medium-quality voltage reference in electronic circuits. The forward voltage drop (about 1.7 V for a red LED or 1.2V for an infrared) can be used instead of a Zener diode in low-voltage regulators. Red LEDs have the flattest I/V curve above the knee. Nitride-based LEDs have a fairly steep I/V curve and are useless for this purpose. Although LED forward voltage is far more current-dependent than a Zener diode, Zener diodes with breakdown voltages below 3 V are not widely available.

The progressive miniaturization of low-voltage lighting technology, such as LEDs and OLEDs, suitable to incorporate into low-thickness materials has fostered experimentation in combining light sources and wall covering surfaces for interior walls in the form of LED wallpaper.

Research and development

[edit]

Key challenges

[edit]

LEDs require optimized efficiency to hinge on ongoing improvements such as phosphor materials and quantum dots.^[113]

The process of down-conversion (the method by which materials convert more-energetic photons to different, less energetic colors) also needs improvement. For example, the red phosphors that are used today are thermally sensitive and need to be improved in that aspect so that they do not color shift and experience efficiency drop-off with temperature. Red phosphors could also benefit from a narrower spectral width to emit more lumens and becoming more efficient at converting photons.^[114]

In addition, work remains to be done in the realms of current efficiency droop, color shift, system reliability, light distribution, dimming, thermal management, and power supply performance.^[113]

Early suspicions were that the LED droop was caused by elevated temperatures. Scientists showed that temperature was not the root cause of efficiency droop.^[115] The mechanism causing efficiency droop was identified in 2007 as Auger recombination, which was taken with mixed reaction.^[66] A 2013 study conclusively identified Auger recombination as the cause.^[116]

Potential technology

[edit]

A new family of LEDs are based on the semiconductors called perovskites. In 2018, less than four years after their discovery, the ability of perovskite LEDs (PLEDs) to produce light from electrons already rivaled those of the best performing OLEDs.^[117] They have a potential for cost-effectiveness as they can be processed from solution, a low-cost and low-tech method, which might allow perovskite-based devices that have large areas to be made with extremely low cost. Their efficiency is superior by eliminating non-radiative losses, in other words, elimination of recombination pathways that do not produce photons; or by solving outcoupling problem (prevalent for thin-film LEDs) or balancing charge carrier injection to increase the EQE (external quantum efficiency). The most up-to-date PLED devices have broken the performance barrier by shooting the EQE above 20%.^[118]

In 2018, Cao et al. and Lin et al. independently published two papers on developing perovskite LEDs with EQE greater than 20%, which made these two papers a mile-stone in PLED development. Their device have similar planar structure, i.e. the active layer (perovskite) is sandwiched between two electrodes. To achieve a high EQE, they not only reduced non-radiative recombination, but also utilized their own, subtly different methods to improve the EQE.^[118]

In the work of Cao *et al.*,^[119] researchers targeted the outcoupling problem, which is that the optical physics of thin-film LEDs causes the majority of light generated by the semiconductor to be trapped in the device.^[120] To achieve this goal, they demonstrated that solution-processed perovskites can spontaneously form submicrometre-scale crystal platelets, which can efficiently extract light from the device. These perovskites are formed via the introduction of amino acid additives into the perovskite precursor solutions. In addition, their method is able to passivate perovskite surface defects and reduce nonradiative recombination. Therefore, by improving the light outcoupling and reducing nonradiative losses, Cao and his colleagues successfully achieved PLED with EQE up to 20.7%.^[119]

Lin and his colleague used a different approach to generate high EQE. Instead of modifying the microstructure of perovskite layer, they chose to adopt a new strategy for managing the compositional distribution in the device—an approach that simultaneously provides high luminescence and balanced charge injection. In other words, they still

used flat emissive layer, but tried to optimize the balance of electrons and holes injected into the perovskite, so as to make the most efficient use of the charge carriers. Moreover, in the perovskite layer, the crystals are perfectly enclosed by MABr additive (where MA is CH_3NH_3). The MABr shell passivates the nonradiative defects that would otherwise be present perovskite crystals, resulting in reduction of the nonradiative recombination. Therefore, by balancing charge injection and decreasing nonradiative losses, Lin and his colleagues developed PLED with EQE up to 20.3%.^[121]

Health and safety

[edit]

Certain blue LEDs and cool-white LEDs can exceed safe limits of the so-called blue-light hazard as defined in eye safety specifications such as "ANSI/IESNA RP-27.1–05: Recommended Practice for Photobiological Safety for Lamp and Lamp Systems".^[122] One study showed no evidence of a risk in normal use at domestic illuminance,^[123] and that caution is only needed for particular occupational situations or for specific populations.^[124] In 2006, the International Electrotechnical Commission published *IEC 62471 Photobiological safety of lamps and lamp systems*, replacing the application of early laser-oriented standards for classification of LED sources.^[125]

While LEDs have the advantage over fluorescent lamps, in that they do not contain mercury, they may contain other hazardous metals such as lead and arsenic.^[126]

In 2016 the American Medical Association (AMA) issued a statement concerning the possible adverse influence of blueish street lighting on the sleep-wake cycle of city-dwellers. Critics in the industry claim exposure levels are not high enough to have a noticeable effect.^[127]

Environmental issues



[edit]

- Light pollution: Because white LEDs emit more short wavelength light than sources such as high-pressure sodium vapor lamps, the increased blue and green sensitivity of scotopic vision means that white LEDs used in outdoor lighting cause substantially more sky glow.^[55]
- Impact on wildlife: LEDs are much more attractive to insects than sodium-vapor lights, so much so that there has been speculative concern about the possibility of disruption to food webs.^{[128][129]} LED lighting near beaches, particularly intense blue and white colors, can disorient turtle hatchlings and make them wander inland instead.^[130] The use of "turtle-safe lighting" LEDs that emit only at narrow portions of the visible spectrum is encouraged by conservancy groups in order to reduce harm.^[131]

- Use in winter conditions: Since they do not give off much heat in comparison to incandescent lights, LED lights used for traffic control can have snow obscuring them, leading to accidents.^{[132][133]}

See also

[edit]

-  [Electronics portal](#)
-  [Energy portal](#)
- LED tattoo
- High-CRI LED lighting
- List of light sources
- MicroLED
- Superluminescent diode
- Perovskite light-emitting diode

References

[edit]

- [^] *"HJ Round was a pioneer in the development of the LED"*. *www.myledpassion.com*. Archived from the original on October 28, 2020. Retrieved April 11, 2017.
- [^] *"The life and times of the LED — a 100-year history" (PDF)*. *The Optoelectronics Research Centre, University of Southampton*. April 2007. Archived from the original (PDF) on September 15, 2012. Retrieved September 4, 2012.
- [^] US Patent 3293513, "Semiconductor Radiant Diode", James R. Biard and Gary Pittman, Filed on Aug. 8th, 1962, Issued on Dec. 20th, 1966.
- [^] *"Inventor of Long-Lasting, Low-Heat Light Source Awarded \$500,000 Lemelson-MIT Prize for Invention"*. Washington, D.C. Massachusetts Institute of Technology. April 21, 2004. Archived from the original on October 9, 2011. Retrieved December 21, 2011.
- [^] Edwards, Kimberly D. *"Light Emitting Diodes" (PDF)*. University of California, Irvine. p. 2. Archived from the original (PDF) on February 14, 2019. Retrieved January 12, 2019.
- [^] *Lighting Research Center*. "How is white light made with LEDs?". Rensselaer Polytechnic Institute. Archived from the original on May 2, 2021. Retrieved January 12, 2019.
- [^] Okon, Thomas M.; Biard, James R. (2015). "The First Practical LED" (PDF). *EdisonTechCenter.org*. Edison Tech Center. Retrieved February 2, 2016.
- [^] Peláez, E. A; Villegas, E. R (2007). "LED power reduction trade-offs for ambulatory pulse oximetry". *2007 29th Annual International Conference of the IEEE Engineering in Medicine and Biology Society*. Vol. 2007. pp. 2296–9. doi:10.1109/IEMBS.2007.4352784. ISBN 978-1-4244-0787-3. ISSN 1557-170X. PMID 18002450. S2CID 34626885.

9. ^ Lossev, O.V. (November 1928). "CII. Luminous carborundum detector and detection effect and oscillations with crystals". *The London, Edinburgh, and Dublin Philosophical Magazine and Journal of Science*. **6** (39): 1024–1044. doi:10.1080/14786441108564683. ISSN 1941-5982.
10. ^ Yao, H. Walter; Schubert, E. Fred; United States; AIXTRON, Inc; Society of Photo-optical Instrumentation Engineers, eds. (2001). *Light-emitting diodes: research, manufacturing, and applications V: 24-25 January 2001, San Jose, USA SPIE proceedings series*. Bellingham, Wash: SPIE. ISBN 978-0-8194-3956-7. OCLC 47203707.
11. ^ Pearsall, Thomas (2010). *Photonics Essentials, 2nd edition*. McGraw-Hill. ISBN 978-0-07-162935-5. Archived from the original on August 17, 2021. Retrieved February 25, 2021.
12. ^ "LED Basics | Department of Energy". www.energy.gov. Retrieved October 22, 2018.
13. ^ "LED Spectral Distribution". optiwave.com. July 25, 2013. Retrieved June 20, 2017.
14. ^ Cooke, Mike (April–May 2010). "Going Deep for UV Sterilization LEDs" (PDF). *Semiconductor Today*. **5** (3): 82. Archived from the original (PDF) on May 15, 2013.
15. ^ **a b** Mori, M.; Hamamoto, A.; Takahashi, A.; Nakano, M.; Wakikawa, N.; Tachibana, S.; Ikehara, T.; Nakaya, Y.; Akutagawa, M.; Kinouchi, Y. (2007). "Development of a new water sterilization device with a 365 nm UV-LED". *Medical & Biological Engineering & Computing*. **45** (12): 1237–1241. doi:10.1007/s11517-007-0263-1. PMID 17978842. S2CID 2821545.
16. ^ **a b** Taniyasu, Y.; Kasu, M.; Makimoto, T. (2006). "An aluminium nitride light-emitting diode with a wavelength of 210 nanometres". *Nature*. **441** (7091): 325–328. Bibcode:2006Natur.441..325T. doi:10.1038/nature04760. PMID 16710416. S2CID 4373542.
17. ^ Kubota, Y.; Watanabe, K.; Tsuda, O.; Taniguchi, T. (2007). "Deep Ultraviolet Light-Emitting Hexagonal Boron Nitride Synthesized at Atmospheric Pressure". *Science*. **317** (5840): 932–934. Bibcode:2007Sci...317..932K. doi:10.1126/science.1144216. PMID 17702939.
18. ^ Watanabe, K.; Taniguchi, T.; Kanda, H. (2004). "Direct-bandgap properties and evidence for ultraviolet lasing of hexagonal boron nitride single crystal". *Nature Materials*. **3** (6): 404–409. Bibcode:2004NatMa...3..404W. doi:10.1038/nmat1134. PMID 15156198. S2CID 23563849.
19. ^ Koizumi, S.; Watanabe, K.; Hasegawa, M.; Kanda, H. (2001). "Ultraviolet Emission from a Diamond pn Junction". *Science*. **292** (5523): 1899–1901. Bibcode:2001Sci...292.1899K. doi:10.1126/science.1060258. PMID 11397942. S2CID 10675358.
20. ^ "Seeing Red with PFS Phosphor".
21. ^ "GE Lighting manufactures PFS red phosphor for LED display backlight applications". March 31, 2015.
22. ^ Murphy, James E.; Garcia-Santamaria, Florencio; Setlur, Anant A.; Sista, Srinivas (2015). "62.4: PFS, $K_2SiF_6:Mn^{4+}$: The Red-line Emitting LED Phosphor behind

- GE's TriGain Technology™ Platform". *Sid Symposium Digest of Technical Papers*. **46**: 927–930. doi:10.1002/sdtp.10406.
23. ^ Dutta, Partha S.; Liotta, Kathryn M. (2018). "Full Spectrum White LEDs of Any Color Temperature with Color Rendering Index Higher Than 90 Using a Single Broad-Band Phosphor". *ECS Journal of Solid State Science and Technology*. **7**: R3194 – R3198. doi:10.1149/2.0251801jss. S2CID 103600941.
 24. ^ Cho, Jaehee; Park, Jun Hyuk; Kim, Jong Kyu; Schubert, E. Fred (2017). "White light-emitting diodes: History, progress, and future". *Laser & Photonics Reviews*. **11** (2): 1600147. Bibcode:2017LPRv...1100147C. doi:10.1002/lpor.201600147. ISSN 1863-8880. S2CID 53645208.
 25. ^ *Light-Emitting Diodes (3rd Edition, 2018)*. E. Fred Schubert. February 3, 2018. ISBN 978-0-9863826-6-6.
 26. ^ *Additive Manufacturing and Strategic Technologies in Advanced Ceramics*. John Wiley & Sons. August 16, 2016. ISBN 978-1-119-23600-9.
 27. ^ Moreno, I.; Contreras, U. (2007). "Color distribution from multicolor LED arrays". *Optics Express*. **15** (6): 3607–3618. Bibcode:2007OExpr..15.3607M. doi:10.1364/OE.15.003607. PMID 19532605. S2CID 35468615.
 28. ^ Yeh, Dong-Ming; Huang, Chi-Feng; Lu, Chih-Feng; Yang, Chih-Chung. "Making white-light-emitting diodes without phosphors | SPIE Homepage: SPIE". spie.org. Retrieved April 7, 2019.
 29. ^ Cabrera, Rowan (2019). *Electronic Devices and Circuits*. EDTECH. ISBN 978-1839473838.
 30. ^ Schubert, E. Fred; Kim, Jong Kyu (2005). "Solid-State Light Sources Getting Smart" (PDF). *Science*. **308** (5726): 1274–1278. Bibcode:2005Sci...308.1274S. doi:10.1126/science.1108712. PMID 15919985. S2CID 6354382. Archived from the original (PDF) on February 5, 2016.
 31. ^ Nimz, Thomas; Hailer, Fredrik; Jensen, Kevin (November 2012). "Sensors and Feedback Control of Multicolor LED Systems". *Led Professional Review: Trends & Technologie for Future Lighting Solutions* (34). *LED Professional*: 2–5. ISSN 1993-890X. Archived from the original (PDF) on April 29, 2014.
 32. ^ Tanabe, S.; Fujita, S.; Yoshihara, S.; Sakamoto, A.; Yamamoto, S. (2005). "YAG glass-ceramic phosphor for white LED (II): Luminescence characteristics" (PDF). In Ferguson, Ian T; Carrano, John C; Taguchi, Tsunemasa; Ashdown, Ian E (eds.). *Fifth International Conference on Solid State Lighting*. Vol. 5941. p. 594112. Bibcode:2005SPIE.5941..193T. doi:10.1117/12.614681. S2CID 38290951. Archived from the original (PDF) on May 11, 2011. cite book: |journal= ignored (help)
 33. ^ Ohno, Y. (2004). Ferguson, Ian T; Narendran, Nadarajah; Denbaars, Steven P; Carrano, John C (eds.). "Color rendering and luminous efficacy of white LED spectra" (PDF). *Proc. SPIE. Fourth International Conference on Solid State Lighting*. **5530**: 89. Bibcode:2004SPIE.5530...88O. doi:10.1117/12.565757. S2CID 122777225. Archived from the original (PDF) on May 11, 2011.
 34. ^ Next-Generation GaN-on-Si White LEDs Suppress Costs, *Electronic Design*, 19 November 2013

35. ^ GaN-on-Silicon LEDs Forecast to Increase Market Share to 40 Percent by 2020, iSuppli, 4 December 2013
36. ^ "All You Want to Know about RGBW LED Light". AGC Lighting.
37. ^ "Tunable White Application Note". enlightenedinc.com.
38. ^ "2021 How Green Light Can Maximize the Quality of Tunable White – LEDucation".
39. ^ **a b** "Understanding LED Color-Tunable Products". Energy.gov.
40. ^ Whitaker, Tim (December 6, 2002). "Joint venture to make ZnSe white LEDs". Retrieved January 3, 2009.
41. ^ Burroughes, J. H.; Bradley, D. D. C.; Brown, A. R.; Marks, R. N.; MacKay, K.; Friend, R. H.; Burns, P. L.; Holmes, A. B. (1990). "Light-emitting diodes based on conjugated polymers". *Nature*. **347** (6293): 539–541. Bibcode:1990Natur.347..539B. doi:10.1038/347539a0. S2CID 43158308.
42. ^ **a b** Kho, Mu-Jeong; Javed, T.; Mark, R.; Maier, E.; David, C (March 4, 2008). *Final Report: OLED Solid State Lighting*. Kodak European Research. Cambridge Science Park, Cambridge, UK.
43. ^ **a b** Bardsley, J. N. (2004). "International OLED Technology Roadmap". *IEEE Journal of Selected Topics in Quantum Electronics*. **10** (1): 3–4. Bibcode:2004IJSTQ..10....3B. doi:10.1109/JSTQE.2004.824077. S2CID 30084021.
44. ^ Hebner, T. R.; Wu, C. C.; Marcy, D.; Lu, M. H.; Sturm, J. C. (1998). "Ink-jet printing of doped polymers for organic light emitting devices". *Applied Physics Letters*. **72** (5): 519. Bibcode:1998ApPhL..72..519H. doi:10.1063/1.120807. S2CID 119648364.
45. ^ Bharathan, J.; Yang, Y. (1998). "Polymer electroluminescent devices processed by inkjet printing: I. Polymer light-emitting logo". *Applied Physics Letters*. **72** (21): 2660. Bibcode:1998ApPhL..72.2660B. doi:10.1063/1.121090. S2CID 44128025.
46. ^ Gustafsson, G.; Cao, Y.; Treacy, G. M.; Klavetter, F.; Colaneri, N.; Heeger, A. J. (1992). "Flexible light-emitting diodes made from soluble conducting polymers". *Nature*. **357** (6378): 477–479. Bibcode:1992Natur.357..477G. doi:10.1038/357477a0. S2CID 4366944.
47. ^ LED-design. Elektor.com. Retrieved on March 16, 2012. Archived August 31, 2012, at the Wayback Machine
48. ^ "OSRAM Radial T1 3/4, SFH 4546 IR LEDs - ams-osram - ams". ams-osram. Retrieved September 19, 2024.
49. ^ "LED Through Hole 5mm (T-1 3/4) Red Built-in resistor 635 nm 4500 mcd 12V". VCC. Retrieved September 19, 2024.
50. ^ "Luminus Products". Luminus Devices. Archived from the original on July 25, 2008. Retrieved October 21, 2009.
51. ^ "Luminus Products CST-90 Series Datasheet" (PDF). Luminus Devices. Archived from the original (PDF) on March 31, 2010. Retrieved October 25, 2009.
52. ^ **a b** "Xlamp Xp-G Led". Cree.com. Cree, Inc. Archived from the original on March 13, 2012. Retrieved March 16, 2012.
53. ^ High Power Point Source White Led NVSx219A Archived July 29, 2021, at the Wayback Machine. Nichia.co.jp, November 2, 2010.

54. ^ "Seoul Semiconductor launches AC LED lighting source Acrich". *LEDS Magazine*. November 17, 2006. Archived from the original on October 15, 2007. Retrieved February 17, 2008.
55. ^ **a b** Visibility, Environmental, and Astronomical Issues Associated with Blue-Rich White Outdoor Lighting (PDF). International Dark-Sky Association. May 4, 2010. Archived from the original (PDF) on January 16, 2013.
56. ^ Oskay, Windell (June 22, 2011). "Does this LED sound funny to you?". Evil Mad Scientist Laboratories. Archived from the original on September 24, 2023. Retrieved January 30, 2024.
57. ^ Tim's Blog (January 14, 2024). "Revisiting Candle Flicker-LEDs: Now with integrated Timer". *cpldcpu.wordpress.com*. Archived from the original on January 29, 2024. Retrieved January 30, 2024.
58. ^ Ting, Hua-Nong (June 17, 2011). *5th Kuala Lumpur International Conference on Biomedical Engineering 2011: BIOMED 2011, 20–23 June 2011, Kuala Lumpur, Malaysia*. Springer Science & Business Media. ISBN 9783642217296.
59. ^ "The Next Generation of LED Filament Bulbs". *LEDInside.com*. Trendforce. Retrieved October 26, 2015.
60. ^ Archived at Ghostarchive and the Wayback Machine: "LED Filaments". YouTube. April 5, 2015. Retrieved October 26, 2015.
61. ^ *Handbook on the Physics and Chemistry of Rare Earths: Including Actinides*. Elsevier Science. August 1, 2016. p. 89. ISBN 978-0-444-63705-5.
62. ^ "Corn Lamps: What Are They & Where Can I Use Them?". Shine Retrofits. September 1, 2016. Retrieved December 30, 2018.
63. ^ "Solid-State Lighting: Comparing LEDs to Traditional Light Sources". *eere.energy.gov*. Archived from the original on May 5, 2009.
64. ^ "Dialight Micro LED SMD LED "598 SERIES" Datasheet" (PDF). *Dialight.com*. Archived from the original (PDF) on February 5, 2009.
65. ^ The LED Museum. Retrieved on March 16, 2012.
66. ^ **a b** Stevenson, Richard (August 2009), "The LED's Dark Secret: Solid-state lighting will not supplant the lightbulb until it can overcome the mysterious malady known as droop". *IEEE Spectrum*.
67. ^ Worthey, James A. "How White Light Works". *LRO Lighting Research Symposium, Light and Color*. Retrieved October 6, 2007.
68. ^ Narra, Prathyusha; Zinger, D.S. (2004). "An effective LED dimming approach". *Conference Record of the 2004 IEEE Industry Applications Conference, 2004. 39th IAS Annual Meeting*. Vol. 3. pp. 1671–1676. doi:10.1109/IAS.2004.1348695. ISBN 978-0-7803-8486-6. S2CID 16372401.
69. ^ "Data Sheet — HLMP-1301, T-1 (3 mm) Diffused LED Lamps". Avago Technologies. Retrieved May 30, 2010.
70. ^ Hecht, E. (2002). *Optics (4 ed.)*. Addison Wesley. p. 591. ISBN 978-0-19-510818-7.
71. ^ "LED Light Bars For Off Road Illumination". Larson Electronics.
72. ^ "LED Design Forum: Avoiding thermal runaway when driving multiple LED strings". *LEDs Magazine*. April 20, 2009. Retrieved January 17, 2019.

73. ^ "Lifetime of White LEDs". Archived from the original on April 10, 2009. Retrieved 2009-04-10., US Department of Energy
74. ^ Lifetime of White LEDs Archived May 28, 2016, at the Wayback Machine. US Department of Energy. (PDF). Retrieved on March 16, 2012.
75. ^ "In depth: Advantages of LED Lighting". *energy.ltgovernors.com*. Archived from the original on November 14, 2017. Retrieved July 27, 2012.
76. ^ Stern, Maïke Lorena; Schellenberger, Martin (March 31, 2020). "Fully convolutional networks for chip-wise defect detection employing photoluminescence images". *Journal of Intelligent Manufacturing*. **32** (1): 113–126. arXiv:1910.02451. doi:10.1007/s10845-020-01563-4. ISSN 0956-5515. S2CID 254655125.
77. ^ Hoque, Md Ashraful; Bradley, Robert Kelley; Fan, Jiajie; Fan, Xuejun (2019). "Effects of humidity and phosphor on silicone/Phosphor composite in white light-emitting diode package". *Journal of Materials Science: Materials in Electronics*. **30** (23): 20471–20478. doi:10.1007/s10854-019-02393-8.
78. ^ "3-Pad LED Flip Chip COB". *LED professional - LED Lighting Technology, Application Magazine*. Retrieved February 15, 2024.
79. ^ OSRAM: green LED
80. ^ Koizumi, S.; Watanabe, K; Hasegawa, M; Kanda, H (2001). "Ultraviolet Emission from a Diamond pn Junction". *Science*. **292** (5523): 1899–2701. Bibcode:2001Sci...292.1899K. doi:10.1126/science.1060258. PMID 11397942.
81. ^ Kubota, Y.; Watanabe, K.; Tsuda, O.; Taniguchi, T. (2007). "Deep Ultraviolet Light-Emitting Hexagonal Boron Nitride Synthesized at Atmospheric Pressure". *Science*. **317** (5840): 932–934. Bibcode:2007Sci...317..932K. doi:10.1126/science.1144216. PMID 17702939.
82. ^ Watanabe, Kenji; Taniguchi, Takashi; Kanda, Hisao (2004). "Direct-bandgap properties and evidence for ultraviolet lasing of hexagonal boron nitride single crystal". *Nature Materials*. **3** (6): 404–409. Bibcode:2004NatMa...3..404W. doi:10.1038/nmat1134. PMID 15156198.
83. ^ "LEDs move into the ultraviolet". *physicsworld.com*. May 17, 2006. Retrieved August 13, 2007.
84. ^ European Photonics Industry Consortium (EPIC). This includes use in data communications over fiber optics as well as "broadcast" data or signaling.
85. ^ Mims, Forrest M. III. "An Inexpensive and Accurate Student Sun Photometer with Light-Emitting Diodes as Spectrally Selective Detectors".
86. ^ "Water Vapor Measurements with LED Detectors". *cs.drexel.edu* (2002).
87. ^ Dziekan, Mike (February 6, 2009) "Using Light-Emitting Diodes as Sensors". *soamsci.or*. Archived May 31, 2013, at the Wayback Machine
88. ^ Ben-Ezra, Moshe; Wang, Jiaping; Wilburn, Bennett; Xiaoyang Li; Le Ma (2008). "An LED-only BRDF measurement device". *2008 IEEE Conference on Computer Vision and Pattern Recognition*. pp. 1–8. CiteSeerX 10.1.1.165.484. doi:10.1109/CVPR.2008.4587766. ISBN 978-1-4244-2242-5. S2CID 206591080.
89. ^ Bantis, Filippou, Sonia Smirnakou, Theoharis Ouzounis, Athanasios Koukounaras, Nikolaos Ntagkas, and Kalliopi Radoglou. "Current status and recent

- achievements in the field of horticulture with the use of light-emitting diodes (LEDs)." *Scientia horticultrae* 235 (2018): 437-451.
90. ^ Miler N., Kulus D., WoÅ...Â°ny A., Rymarz D., Hajzer M., Wierzbowski K., Nelke R., Szeffs L., 2019. Application of wide-spectrum light-emitting diodes in micropropagation of popular ornamental plant species: A study on plant quality and cost reduction. *In Vitro Cellular and Developmental Biology – Plant* 55: 99-108. <https://doi.org/10.1007/s11627-018-9939-5>
 91. ^ TymoszuK A., Kulus D., BÅ...â€šaÅ...Â¼ejewska A., Nadolan K., KulpiÅ...â€žska A., Pietrzykowski K., 2023. Application of wide-spectrum light-emitting diodes in the indoor production of cucumber and tomato seedlings. *Acta Agrobotanica* 76: 762. <https://doi.org/10.5586/aa.762>
 92. ^ TymoszuK A., Kulus D., Kowalska J., KulpiÅ...â€žska A., PaÅ...â€žka D., Jeske M., Antkowiak M. 2024. Light spectrum affects growth, metabolite profile, and resistance against fungal phytopathogens of *Solanum lycopersicum* L. seedlings. *Journal of Plant Protection Research* 64(2). <https://doi.org/10.24425/jppr.2024.150247>
 93. ^ Kulus D., WoÅ...Â°ny A., 2020. Influence of light conditions on the morphogenetic and biochemical response of selected ornamental plant species under in vitro conditions: A mini-review. *BioTechnologia* 101(1): 75-83. <http://doi.org/10.5114/bta.2020.92930>
 94. ^ "L-Prize U.S. Department of Energy"[usurped], L-Prize Website, August 3, 2011
 95. ^ LED There Be Light, *Scientific American*, March 18, 2009
 96. ^ Eisenberg, Anne (June 24, 2007). "In Pursuit of Perfect TV Color, With L.E.D.'s and Lasers". *New York Times*. Retrieved April 4, 2010.
 97. ^ "CDC – NIOSH Publications and Products – Impact: NIOSH Light-Emitting Diode (LED) Cap Lamp Improves Illumination and Decreases Injury Risk for Underground Miners". *cdc.gov*. 2011. doi:10.26616/NIOSH PUB2011192. Retrieved May 3, 2013. cite journal: Cite journal requires |journal= (help)
 98. ^ Janeway, Kimberly (December 12, 2014). "LED lightbulbs that promise to help you sleep". *Consumer Reports*. Retrieved May 10, 2018.
 99. ^ "LED Device Illuminates New Path to Healing" (Press release). *nasa.gov*. Archived from the original on October 13, 2008. Retrieved January 30, 2012.
 100. ^ Fudin, M. S.; Mynbaev, K. D.; Aifantis, K. E.; Lipsanen H.; Bougrov, V. E.; Romanov, A. E. (2014). "Frequency characteristics of modern LED phosphor materials". *Scientific and Technical Journal of Information Technologies, Mechanics and Optics*. **14** (6).
 101. ^ Green, Hank (October 9, 2008). "Transmitting Data Through LED Light Bulbs". *EcoGeek*. Archived from the original on December 12, 2008. Retrieved February 15, 2009.
 102. ^ Dimitrov, Svilen; Haas, Harald (2015). *Principles of LED Light Communications: Towards Networked Li-Fi*. Cambridge: Cambridge University Press. doi:10.1017/cbo9781107278929. ISBN 978-1-107-04942-0.
 103. ^ Sampath, A. V.; Reed, M. L.; Moe, C.; Garrett, G. A.; Readinger, E. D.; Sarney, W. L.; Shen, H.; Wraback, M.; Chua, C. (December 1, 2009), "The effects of

- increasing AlN mole fraction on the performance of AlGaIn active regions containing nanometer scale compositionally inhomogeneities", *Advanced High Speed Devices, Selected Topics in Electronics and Systems*, vol. 51, World Scientific, pp. 69–76, doi:10.1142/9789814287876_0007, ISBN 9789814287869
104. ^ **a b** Liao, Yitao; Thomidis, Christos; Kao, Chen-kai; Moustakas, Theodore D. (February 21, 2011). "AlGaIn based deep ultraviolet light emitting diodes with high internal quantum efficiency grown by molecular beam epitaxy". *Applied Physics Letters*. **98** (8): 081110. Bibcode:2011ApPhL..98h1110L. doi:10.1063/1.3559842. ISSN 0003-6951.
 105. ^ **a b c d e** Cabalo, Jerry; DeLucia, Marla; Goad, Aime; Lacis, John; Narayanan, Fiona; Sickenberger, David (October 2, 2008). Carrano, John C.; Zukauskas, Arturas (eds.). "Overview of the TAC-BIO detector". *Optically Based Biological and Chemical Detection for Defence IV*. **7116**. International Society for Optics and Photonics: 71160D. Bibcode:2008SPIE.7116E..0DC. doi:10.1117/12.799843. S2CID 108562187.
 106. ^ Poldmae, Aime; Cabalo, Jerry; De Lucia, Marla; Narayanan, Fiona; Strauch III, Lester; Sickenberger, David (September 28, 2006). Carrano, John C.; Zukauskas, Arturas (eds.). "Biological aerosol detection with the tactical biological (TAC-BIO) detector". *Optically Based Biological and Chemical Detection for Defence III*. **6398**. SPIE: 63980E. doi:10.1117/12.687944. S2CID 136864366.
 107. ^ "Army advances bio-threat detector". www.army.mil. January 22, 2015. Retrieved October 10, 2019.
 108. ^ Kesavan, Jana; Kilper, Gary; Williamson, Mike; Alstadt, Valerie; Dimmock, Anne; Bascom, Rebecca (February 1, 2019). "Laboratory validation and initial field testing of an unobtrusive bioaerosol detector for health care settings". *Aerosol and Air Quality Research*. **19** (2): 331–344. doi:10.4209/aaqr.2017.10.0371. ISSN 1680-8584.
 109. ^ Dietz, P. H.; Yerazunis, W. S.; Leigh, D. L. (2004). "Very Low-Cost Sensing and Communication Using Bidirectional LEDs". cite journal: Cite journal requires |journal= (help)
 110. ^ Goins, G. D.; Yorio, N. C.; Sanwo, M. M.; Brown, C. S. (1997). "Photomorphogenesis, photosynthesis, and seed yield of wheat plants grown under red light-emitting diodes (LEDs) with and without supplemental blue lighting". *Journal of Experimental Botany*. **48** (7): 1407–1413. doi:10.1093/jxb/48.7.1407. PMID 11541074.
 111. ^ Li, Jinmin; Wang, Junxi; Yi, Xiaoyan; Liu, Zhiqiang; Wei, Tongbo; Yan, Jianchang; Xue, Bin (August 31, 2020). *III-Nitrides Light Emitting Diodes: Technology and Applications*. Springer Nature. p. 248. ISBN 978-981-15-7949-3.
 112. ^ Gaska, R.; Shur, M. S.; Zhang, J. (October 2006). "Physics and Applications of Deep UV LEDs". *2006 8th International Conference on Solid-State and Integrated Circuit Technology Proceedings*. pp. 842–844. doi:10.1109/ICSICT.2006.306525. ISBN 1-4244-0160-7. S2CID 17258357.
 113. ^ **a b** "LED R&D Challenges". Energy.gov. Retrieved March 13, 2019.
 114. ^ "JULY 2015 POSTINGS". Energy.gov. Retrieved March 13, 2019.

115. ^ Identifying the Causes of LED Efficiency Droop Archived 13 December 2013 at the Wayback Machine, By Steven Keeping, Digi-Key Corporation Tech Zone
116. ^ Iveland, Justin; et al. (April 23, 2013). "Cause of LED Efficiency Droop Finally Revealed". *Physical Review Letters*, 2013.
117. ^ Di, Dawei; Romanov, Alexander S.; Yang, Le; Richter, Johannes M.; Rivett, Jasmine P. H.; Jones, Saul; Thomas, Tudor H.; Abdi Jalebi, Mojtaba; Friend, Richard H.; Linnolahti, Mikko; Bochmann, Manfred (April 14, 2017). "High-performance light-emitting diodes based on carbene-metal-amides" (PDF). *Science* . **356** (6334): 159–163. arXiv:1606.08868. Bibcode:2017Sci...356..159D. doi:10.1126/science.aah4345. ISSN 0036-8075. PMID 28360136. S2CID 206651900.
118. ^ a b Armin, Ardalan; Meredith, Paul (October 2018). "LED technology breaks performance barrier". *Nature*. **562** (7726): 197–198. Bibcode:2018Natur.562..197M. doi:10.1038/d41586-018-06923-y. PMID 30305755.
119. ^ a b Cao, Yu; Wang, Nana; Tian, He; Guo, Jingshu; Wei, Yingqiang; Chen, Hong; Miao, Yanfeng; Zou, Wei; Pan, Kang; He, Yarong; Cao, Hui (October 2018). "Perovskite light-emitting diodes based on spontaneously formed submicrometre-scale structures". *Nature*. **562** (7726): 249–253. Bibcode:2018Natur.562..249C. doi:10.1038/s41586-018-0576-2. ISSN 1476-4687. PMID 30305742.
120. ^ Cho, Sang-Hwan; Song, Young-Woo; Lee, Joon-gu; Kim, Yoon-Chang; Lee, Jong Hyuk; Ha, Jaeheung; Oh, Jong-Suk; Lee, So Young; Lee, Sun Young; Hwang, Kyu Hwan; Zang, Dong-Sik (August 18, 2008). "Weak-microcavity organic light-emitting diodes with improved light out-coupling". *Optics Express*. **16** (17): 12632–12639. Bibcode:2008OExpr..1612632C. doi:10.1364/OE.16.012632. ISSN 1094-4087. PMID 18711500.
121. ^ Lin, Kebin; Xing, Jun; Quan, Li Na; de Arquer, F. Pelayo García; Gong, Xiwen; Lu, Jianxun; Xie, Liqiang; Zhao, Weijie; Zhang, Di; Yan, Chuazhong; Li, Wenqiang (October 2018). "Perovskite light-emitting diodes with external quantum efficiency exceeding 20 per cent". *Nature*. **562** (7726): 245–248. Bibcode:2018Natur.562..245L. doi:10.1038/s41586-018-0575-3. hdl:10356/141016. ISSN 1476-4687. PMID 30305741. S2CID 52958604.
122. ^ "Blue LEDs: A health hazard?". *texyt.com*. January 15, 2007. Retrieved September 3, 2007.
123. ^ Some evidences that white LEDs are toxic for human at domestic radiance?. Radioprotection (2017-09-12). Retrieved on 2018-07-31.
124. ^ Point, S. and Barlier-Salsi, A. (2018) LEDs lighting and retinal damage, technical information sheets, SFRP
125. ^ "LED Based Products Must Meet Photobiological Safety Standards: Part 2". *ledsmagazine.com*. November 29, 2011. Retrieved January 9, 2022.
126. ^ Lim, S. R.; Kang, D.; Ogunseitan, O. A.; Schoenung, J. M. (2011). "Potential Environmental Impacts of Light-Emitting Diodes (LEDs): Metallic Resources, Toxicity, and Hazardous Waste Classification". *Environmental Science & Technology*. **45** (1): 320–327. Bibcode:2011EnST...45..320L. doi:10.1021/es101052q. PMID 21138290.

127. ^ "Response to the AMA Statement on High Intensity Street Lighting". *ledroadwaylighting.com*. Archived from the original on January 19, 2019. Retrieved January 17, 2019.
128. ^ Stokstad, Erik (October 7, 2014). "LEDs: Good for prizes, bad for insects". *Science*. Retrieved October 7, 2014.
129. ^ Pawson, S. M.; Bader, M. K.-F. (2014). "LED Lighting Increases the Ecological Impact of Light Pollution Irrespective of Color Temperature". *Ecological Applications*. **24** (7): 1561–1568. Bibcode:2014EcoAp..24.1561P. doi:10.1890/14-0468.1. PMID 29210222.
130. ^ Polakovic, Gary (June 12, 2018). "Scientist's new database can help protect wildlife from harmful hues of LED lights". *USC News*. Archived from the original on May 19, 2020. Retrieved December 16, 2019.
131. ^ "Information About Sea Turtles: Threats from Artificial Lighting". *Sea Turtle Conservancy*. Retrieved December 16, 2019.
132. ^ "Stoplights' Unusual, Potentially Deadly Winter Problem". *ABC News*. January 8, 2010. Archived from the original on December 12, 2023.
133. ^ Markley, Stephen (December 17, 2009). "LED Traffic Lights Can't Melt Snow, Ice". *Cars.com*. Archived from the original on June 6, 2019.


Further reading

[edit]


- o David L. Heiserman (1968). *Light -Emitting Diodes (PDF)*. *Electronics World*.
- o Shuji Nakamura; Gerhard Fasol; Stephen J Pearton (2000). *The Blue Laser Diode: The Complete Story*. Springer Verlag. ISBN 978-3-540-66505-2.

External links

[edit]



Wikimedia Commons has media related to **Light-emitting diodes** and **Light-emitting diodes (SMD)**.



Look up **light-emitting diode** in Wiktionary, the free dictionary.

- o Building a do-it-yourself LED
- o Color cycling LED in a single two pin package,
- o Educational video on LEDs on YouTube
- o v
- o t
- o e

Lighting

Concepts

- Accent lighting
- Color rendering index
- Color temperature
- Electric light
- Glare
- Light fixture
- Light pollution
 - Hawaii
 - Hong Kong
- Lightbulb socket
 - Bi-pin lamp base
 - Edison screw
- Luminous efficacy
- Task lighting

Methods of generation	Incandescent	○ Regular
		○ Edison
		○ Halogen
		○ Nernst
		○ Cathodoluminescent <ul style="list-style-type: none"> ○ Electron-stimulated
	Luminescent	○ Chemiluminescent
		○ Electrochemiluminescence
		○ Electroluminescent <ul style="list-style-type: none"> ○ field-induced polymer
		○ Fluorescent <ul style="list-style-type: none"> ○ Fluorescent lamp (compact) ○ Fluorescent induction
		○ Photoluminescent <ul style="list-style-type: none"> ○ Laser headlamp
Combustion	○ Radioluminescence	
	○ Solid-state <ul style="list-style-type: none"> ○ LED lamp 	
	○ Acetylene/Carbide	
	○ Argand	
	○ Campfire	
	○ Candle	
	○ Carcel	
	○ Diya	
	○ Flare	
	○ Gas	
	○ Kerosene <ul style="list-style-type: none"> ○ Petromax 	
	○ Lantern <ul style="list-style-type: none"> ○ Fanous ○ Paper 	
	○ Limelight	
	○ Luchina	
	○ Magnesium torch	
○ Oil <ul style="list-style-type: none"> ○ Qulliq 		
○ Rushlight		
○ Safety		
○ Tilley		
○ Torch		
Electric arc	○ Carbon arc	
	○ Klieg light	
	○ Yablochkov candle	
	○ Deuterium arc	
	○ Neon <ul style="list-style-type: none"> ○ Neon lamp 	
Gas discharge	○ Plasma <ul style="list-style-type: none"> ○ Sulfur 	

Stationary

- Reflector
 - Ellipsoidal reflector
 - Multifaceted reflector
 - Parabolic aluminized reflector (PAR)
- Aviation obstruction
- Balanced-arm lamp
- Chandelier
- Emergency light
- Gas lighting
- Gooseneck lamp
- Intelligent street lighting
- Light tube
- Nightlight
- Neon lighting
- Pendant light
- Recessed light
- Sconce
- Street light
 - in the US
- Torchère
- Track lighting
- Troffer
- Bicycle lighting
- Flashlight
 - Mechanically powered
 - Tactical

Portable

- Glow stick
- Headlamp
 - outdoor
- Lantern
- Laser pointer
- Navigation light
- Searchlight
- Solar lamp

- Automotive light bulb types
 - Daytime running lamp
 - Headlamp
 - hidden
 - high-intensity discharge
 - sealed beam
- Automotive**
- Rear position lights
- Reversing lights
- Safety reflector
 - retroreflector
- Stop lights
- Turn signals
 - trafficators
- Aroma lamp
- Blacklight
- Bubble light
- Christmas lights
- Crackle tube
- DJ lighting
- Electroluminescent wire
- Lava lamp
- Marquee
- Plasma globe
- Strobe light
- Floodlight
- Footlight
- Gobo
- Scoop
- Spotlight
 - ellipsoidal reflector
- Stage lighting instrument
- Germicidal
- Grow light
- Infrared lamp
- Stroboscope
- Tanning
- Battlefield illumination
- Bioluminescence
- Laser
- Light art
- Luminous gemstones
- Signal lamp
- Sources
 - Reflected

- **Display**
- **Decorative**

- **Theatrical**
- **Cinematic**

- **Industrial**
- **Scientific**

Related topics

- v
- t
- e

Display technology

- Past generation**
- Eidophor
 - Cathode-ray tube (CRT)
 - Jumbotron
 - Electroluminescent display (ELD)
 - Rear-projection display
 - Plasma display panel (PDP)
 - ALiS
 - Quantum dot display (QLED)
 - Electronic paper
 - E Ink
 - Gyricon
 - Light-emitting diode display (LED)
 - Organic light-emitting diode (OLED)
 - Active-Matrix Organic light-emitting diode (AMOLED)
- Current generation**
- Liquid-crystal display (LCD)
 - TFT
 - TN
 - IPS
 - LED-backlit
 - Blue Phase
 - Digital Light Processing (DLP)
 - Liquid crystal on silicon (LCoS)
 - microLED
 - Electroluminescent Quantum Dots (ELQD/QD-LED)
 - Organic light-emitting transistor (OLET)
 - Surface-conduction electron-emitter display (SED)
 - Field-emission display (FED)
 - Laser TV
 - Quantum dot
 - Liquid crystal
- Next generation**
- MEMS display
 - IMoD
 - TMOS
 - Ferroelectric liquid crystal display (FLCD)
 - Thick-film dielectric electroluminescent technology (TDEL)
 - Laser-powered phosphor display (LPD)
- Video displays**

- Electromechanical
 - Flip-dot
 - Split-flap
- Eggcrate
- Fiber-optic
- Nixie tube
- Vacuum fluorescent display (VFD)
- Non-video**
 - Light-emitting electrochemical cell (LEC)
 - Lightguide display
 - Dot-matrix display
 - Seven-segment display (SSD)
 - Eight-segment display
 - Nine-segment display
 - Fourteen-segment display (FSD)
 - Sixteen-segment display (SISD)
 - Stereoscopic
 - Autostereoscopic
 - Multiscopic
- 3D display**
 - Hologram
 - Holographic display
 - Computer-generated holography
 - Volumetric
 - Fog display
 - Monoscope
 - Movie projector
- Static media**
 - Neon sign
 - Slide projector
 - Transparency
 - Laser beam
 - EDID
 - CEA-861
- Display capabilities**
 - DisplayID
 - Always-on display
 - See-through display
 - Scan line
 - History of display technology
 - Large-screen television technology
- Related articles**
 - Optimum HDTV viewing distance
 - High Dynamic Range (HDR)
 - Color Light Output
 - Flexible display
 - Comparison of CRT, LCD, plasma, and OLED displays

Comparison of display technology

- v
- t
- e

Electronic components

- Transistor
- NMOS
- PMOS
- BiCMOS
- BioFET
- Chemical field-effect transistor (ChemFET)
- Complementary MOS (CMOS)
- Depletion-load NMOS
- Fin field-effect transistor (FinFET)
- Floating-gate MOSFET (FGMOS)
- Insulated-gate bipolar transistor (IGBT)
- ISFET
- LDMOS
- MOS field-effect transistor (MOSFET)
- Multi-gate field-effect transistor (MuGFET)
- Power MOSFET
- Thin-film transistor (TFT)
- VMOS
- UMOS
- Bipolar junction transistor (BJT)
- Darlington transistor
- Diffused junction transistor
- Field-effect transistor (FET)
 - Junction Gate FET (JFET)
 - Organic FET (OFET)
- Light-emitting transistor (LET)
 - Organic LET (OLET)
- Pentode transistor
- Point-contact transistor
- Programmable unijunction transistor (PUT)
- Static induction transistor (SIT)
- Tetrode transistor
- Unijunction transistor (UJT)
- Avalanche diode
- Constant-current diode (CLD, CRD)
- Gunn diode
- Laser diode (LD)
- Light-emitting diode (LED)
- Organic light-emitting diode (OLED)
- Photodiode
- PIN diode
- Schottky diode
- Step recovery diode
- Zener diode
- Printed electronics
- Printed circuit board
- DIAC
- Heterostructure barrier varactor

**MOS
transistors**

**Other
transistors**

**Semiconductor
devices**

Diodes

Voltage regulators

- Linear regulator
- Low-dropout regulator
- Switching regulator
- Buck
- Boost
- Buck–boost
- Split-pi
- Ā,,â€ uk
- SEPIC
- Charge pump
- Switched capacitor

Vacuum tubes

- Acorn tube
- Audion
- Beam tetrode
- Barretter
- Compactron
- Diode
- Fleming valve
- Neutron tube
- Nonode
- Nuvistor
- Pentagrid (Hexode, Heptode, Octode)
- Pentode
- Photomultiplier
- Phototube
- Tetrode
- Triode
- Backward-wave oscillator (BWO)
- Cavity magnetron
- Crossed-field amplifier (CFA)
- Gyrotron

Vacuum tubes (RF)

- Inductive output tube (IOT)
- Klystron
- Maser
- Sutton tube
- Traveling-wave tube (TWT)
- X-ray tube

Cathode-ray tubes

- Beam deflection tube
- Charactron
- Iconoscope
- Magic eye tube
- Monoscope
- Selectron tube
- Storage tube
- Trochotron
- Video camera tube
- Williams tube
- Cold cathode
- Crossatron
- Dekatron
- Ignitron
- Krytron

Gas-filled tubes

- Mercury-arc valve
- Neon lamp
- Nixie tube
- Thyatron
- Trigatron
- Voltage-regulator tube
- Potentiometer

Adjustable

- digital
- Variable capacitor
- Varicap
- Connector
 - audio and video
 - electrical power
 - RF
- Electrolytic detector
- Ferrite
- Antifuse
- Fuse

Passive

- resettable
- eFUSE
- Resistor
- Switch
- Thermistor
- Transformer
- Varistor
- Wire
 - Wollaston wire

Reactive

- Capacitor
 - types
- Ceramic resonator
- Crystal oscillator
- Inductor
- Parametron
- Relay
 - reed relay
 - mercury relay

Authority control databases: National      [Edit this at Wikidata](#)

- Germany

- Czech Republic

About Overhead Door Company of Joliet

Photo

Image not found or type unknown

Photo

Image not found or type unknown

Photo

Image not found or type unknown

Photo

Image not found or type unknown

Photo

Image not found or type unknown

Photo

Image not found or type unknown

Photo

Image not found or type unknown

Photo

Image not found or type unknown

Photo

Image not found or type unknown

Things To Do in Will County

Photo

Image not found or type unknown

Gaylord Building Historic Site

4.8 (209)

Photo

Image not found or type unknown

Lincoln Landing

4.6 (134)

Photo

Lake Renwick Heron Rookery Nature Preserve

4.6 (87)

Photo

Image not found or type unknown

Isle A La Cache Museum Pavilion

5 (1)

Photo

Image not found or type unknown

Joliet Area Historical Museum

4.6 (679)

Photo

Knoch Knolls Nature Center

4.8 (541)

Photo

Image not found or type unknown

Blues Brothers Copmobile

4.3 (27)

Driving Directions in Will County

Driving Directions From Honorable Edward A Burmila Jr to Overhead Door Company of Joliet

Driving Directions From Red Roof Inn Chicago - Joliet to Overhead Door Company of Joliet

Driving Directions From Honorable Thomas A Dunn to Overhead Door Company of Joliet

Driving Directions From Clarion Hotel & Convention Center Joliet to Overhead Door Company of Joliet

Driving Directions From Honorable Robert Brumund to Overhead Door Company of Joliet

https://www.google.com/maps/dir/Red+Roof+Inn+Chicago+-+Joliet/Overhead+Door+Company+of+Joliet/@41.5149984,-88.1229244,14z/data=!3m1!4b1!4m14!4m13!1m5!1m1!1sChIJg-X-cXphDogRD_JbCFeaRZg!2m2!1d-88.1229244!2d41.5149984!1m5!1m1!1sChIJLWV_oV9hDogRGyJUaaoTEjk!2m2!1d-88.106331!2d41.5069115!3e0

https://www.google.com/maps/dir/Joliet/Overhead+Door+Company+of+Joliet/@41.525031,-88.0817251,14z/data=!3m1!4b1!4m14!4m13!1m5!1m1!1sChIJfT027GtFDogRQsBro_dmn!2m2!1d-88.0817251!2d41.525031!1m5!1m1!1sChIJLWV_oV9hDogRGyJUaaoTEjk!2m2!1d-88.106331!2d41.5069115!3e2

https://www.google.com/maps/dir/Joliet+West+High+School/Overhead+Door+Company+of+Joliet/@41.525031,-88.1259821,14z/data=!3m1!4b1!4m14!4m13!1m5!1m1!1sChIJMQCe7QthDogRpEY4_0cg!2m2!1d-88.1259821!2d41.5285745!1m5!1m1!1sChIJLWV_oV9hDogRGyJUaaoTEjk!2m2!1d-88.106331!2d41.5069115!3e1

https://www.google.com/maps/dir/Honorable+Edward+A+Burmila+Jr/Overhead+Door+Company+of+Joliet/@41.5244092,-88.0822783,14z/data=!3m1!4b1!4m14!4m13!1m5!1m1!1sChIJ4ykaz7dmDogRQ3QTxvQE!2m2!1d-88.0822783!2d41.5244092!1m5!1m1!1sChIJLWV_oV9hDogRGyJUaaoTEjk!2m2!1d-88.106331!2d41.5069115!3e3

https://www.google.com/maps/dir/Dollar+General/Overhead+Door+Company+of+Joliet/@41.5227028,-88.104361,14z/data=!3m1!4b1!4m14!4m13!1m5!1m1!1sChIJNQmB1UZhDogRdJIXSnAM!2m2!1d-88.104361!2d41.5227028!1m5!1m1!1sChIJLWV_oV9hDogRGyJUaaoTEjk!2m2!1d-88.106331!2d41.5069115!3e0

https://www.google.com/maps/dir/The+Haley+Mansion/Overhead+Door+Company+of+Joliet/@41.5223571,-88.0916596,14z/data=!3m1!4b1!4m14!4m13!1m5!1m1!1sChIJr-rdFkthDogRLc6io_9nPS!2m2!1d-88.0916596!2d41.5223571!1m5!1m1!1sChIJLWV_oV9hDogRGyJUaaoTEjk!2m2!1d-88.106331!2d41.5069115!3e2

Driving Directions From Des Plaines River viewing point to Overhead Door Company of Joliet

Driving Directions From Knoch Knolls Nature Center to Overhead Door Company of Joliet

Driving Directions From Lincoln Landing to Overhead Door Company of Joliet

Driving Directions From Knoch Knolls Nature Center to Overhead Door Company of Joliet

Driving Directions From Blues Brothers Copmobile to Overhead Door Company of Joliet

Driving Directions From Isle A La Cache Museum Pavilion to Overhead Door Company of Joliet

Driving Directions From Joliet Iron Works Park to Overhead Door Company of Joliet

https://www.google.com/maps/dir/Fox+Museum/Overhead+Door+Company+of+Joliet/@88.0548128,14z/data=!3m1!4b1!4m14!4m13!1m5!1m1!1sunknown!2m2!1d-88.0548128!2d41.5885338!1m5!1m1!1sChIJLWV_oV9hDogRGyjUaaoTEjk!2m2!1d-88.106331!2d41.5069115!3e0

https://www.google.com/maps/dir/Knoch+Knolls+Nature+Center/Overhead+Door+Comp88.1412172,14z/data=!3m1!4b1!4m14!4m13!1m5!1m1!1sunknown!2m2!1d-88.1412172!2d41.7141117!1m5!1m1!1sChIJLWV_oV9hDogRGyjUaaoTEjk!2m2!1d-88.106331!2d41.5069115!3e2

https://www.google.com/maps/dir/Knoch+Knolls+Nature+Center/Overhead+Door+Comp88.1412172,14z/data=!3m1!4b1!4m14!4m13!1m5!1m1!1sunknown!2m2!1d-88.1412172!2d41.7141117!1m5!1m1!1sChIJLWV_oV9hDogRGyjUaaoTEjk!2m2!1d-88.106331!2d41.5069115!3e1

https://www.google.com/maps/dir/Des+Plaines+River+viewing+point/Overhead+Door+C88.0581975,14z/data=!3m1!4b1!4m14!4m13!1m5!1m1!1sunknown!2m2!1d-88.0581975!2d41.6556644!1m5!1m1!1sChIJLWV_oV9hDogRGyjUaaoTEjk!2m2!1d-88.106331!2d41.5069115!3e3

https://www.google.com/maps/dir/Lincoln+Landing/Overhead+Door+Company+of+Joliet+88.0583755,14z/data=!3m1!4b1!4m14!4m13!1m5!1m1!1sunknown!2m2!1d-88.0583755!2d41.5902263!1m5!1m1!1sChIJLWV_oV9hDogRGyJUaaoTEjk!2m2!1d-88.106331!2d41.5069115!3e0

Reviews for Overhead Door Company of Joliet

Overhead Door Company of Joliet

Image not found or type unknown

Jim Chuporak

(5)

Received a notice the morning of telling me when to expect the men to come and put the door in. he was on time, answered all my questions, worked diligently in the cold. And did an absolutely awesome job. Everything was cleaned up, hauled away from the old door. I am extremely happy with the service I received from the first phone call I made through having the door put in. My wife and I are very, very happy with the door.

Overhead Door Company of Joliet

Image not found or type unknown

Hector Melero

(5)

Had a really great experience with Middleton Overhead Doors. My door started to bow and after several attempts on me fixing it I just couldn't get it. I didn't want to pay on something I knew I could fix. Well, I gave up and they came out and made it look easy. I know what they are doing not to mention they called me before hand to confirm my appointment and they showed up at there scheduled appointment. I highly recommend Middleton Overhead Doors on any work that needs to be done

Overhead Door Company of Joliet

Image not found or type unknown

Andrea Nitsche

(4)

Scheduling was easy, job was done quickly. Little disappointed that they gave me a quote over email (which they confirmed was for labor and materials), but when they finished it was just over \$30 more. Not a huge deal, but when I asked why, I was told they gave me an approx cost and it depends on what is needed. I get that in general, however, they installed the door and I gave them my address and pics of the existing prior to getting a quote. I feel like they could have been more upfront with pricing. And just a heads up, it was pricey... Had them change the weather stripping, from ringing my doorbell to pulling out my driveway when done was literally 20 mins, cost was just over \$260 ?

Overhead Door Company of Joliet

Image not found or type unknown

Owen McCarthy

(5)

I called the office just by chance to see if there was an available opening for a service call to repair a busted spring. Unfortunately I didn't catch the name of the person who answered, but she couldn't have been more pleasant and polite. She was able to get a tech to my house in an hour. I believe the tech's name was Mike and he too was amazing. He quickly resolved my issue and even corrected a couple of things that he saw that weren't quite right. I would recommend to anyone and will definitely call on Middleton for any future needs. Thank you all for your great service.

Overhead Door Company of Joliet

Image not found or type unknown

Kelley Jansa

(5)

We used Middleton Door to upgrade our garage door. We had three different companies come out to quote the job and across the board Middleton was better. They were professional, had plenty of different options and priced appropriately. The door we ordered came with a small dent and they handled getting a new panel ordered and reinstalled very quickly.

Recognizing Signs of Worn Cables [View GBP](#)

Frequently Asked Questions

What are the common signs that garage door cables are worn or damaged?

Common signs include fraying, visible rust, kinks or twists, and loose strands. If you notice any of these issues, it's important to address them promptly to avoid potential safety hazards.

How can I safely inspect the condition of my garage door cables?

To safely inspect your cables, first disconnect the power to the garage door opener. Then visually examine the entire length of each cable for signs of wear such as fraying or rust. Ensure you're cautious and do not handle cables directly if they appear severely damaged.

What should I do if I discover my garage door cables are worn?

If you find worn cables, it's best to contact a professional technician for repair or replacement. Handling high-tension components like garage door cables can be dangerous without proper tools and expertise.

Can regular maintenance help prevent cable wear in garage doors?

Yes, regular maintenance can help prevent excessive wear on garage door cables. Lubricating moving parts, checking for balance issues, and having periodic inspections by professionals will extend their lifespan and ensure safe operation.

Overhead Door Company of Joliet

Phone : +18157256077

City : Joliet

State : IL

Zip : 60436

Address : Unknown Address

Google Business Profile

Company Website : <https://overheaddoorjoliet.com/garage-door-repair-romeoville.aspx>

Sitemap

Privacy Policy

About Us